

NV45AB2



# metabo **HPT**

## PRO-PREFERRED BRAND

Metabo HPT is proud to be the  
**PRO-PREFERRED BRAND FOR PNEUMATIC NAILERS**  
for the ninth year in a row! \*



NR83A5S1



NR3690DR



### 2023 NAILER CATALOG

Pneumatic Nailers & Staplers | Cordless Nailers  
Air Compressors | Fasteners

\* For pneumatic nailers based on the 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021 & 2022 Product Brand Survey of Pneumatic Nailers in Builder & Developer Magazine

EP9018



# THE PRO-PREFERRED BRAND OF NAILERS\*




**NV45AB2**  
1 3/4" Coil Roofing Nailer  
• Asphalt Shingles, Fiberglass Shingles, Insulation Boards

**NR83A5**  
3 1/4" Plastic Collated Framing Nailer  
• Framing, Decking, Fencing, Roof & Floor Sheathing

**NR3690DRS**  
36V MultiVolt Cordless  
21° Plastic Collated Framing Nailer  
• Framing, Decking, Fencing, Roof & Floor Sheathing



**NV65AH2**  
2 1/2" Coil Siding Nailer  
• Siding, Wood Fencing



**N3808AP**  
1-1/2" Cap Stapler  
• House wrap, roof underlayment



**NT1865DMAST**  
18V MultiVolt Cordless  
15-Ga Cordless Finish Nailer  
• Window Trimming  
Finish Applications



**NR3675DD**  
36V MultiVolt Cordless  
3-1/2" Forming Nailer  
• Concrete Wall Forms  
• Uses duplex nails



**EC36DAQ4**  
18V MultiVolt Cordless  
2-Gal Air Compressor  
• Powers Finish and  
trimming work



**N4004AB**  
1/4" Crown Flooring Stapler  
• Hardwood & Engineered  
• Hardwood Flooring Installation



**N5024A2**  
1" Sheathing Stapler  
• Exterior wall sheathing installation



**EC914S**  
200 PSI Compressor  
• Powers Framing, Roofing,  
Siding, and Finish Crews



**NT50A5**  
2" 18-Gauge PRO Brad Nailer  
• Moldings, Trim, Cabinets, and Furniture



Compressors



Pneumatic  
Nailers & Staplers




Cordless Nailers

**FOR FULL WARRANTY INFO  
SEE PAGE 37**

\*Based on the 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021 & 2022 Product Brand Survey in Builder & Developer Magazine

# **CORDLESS NAILERS FEEL LIKE PNEUMATIC THANKS TO AIR SPRING DRIVE SYSTEM**

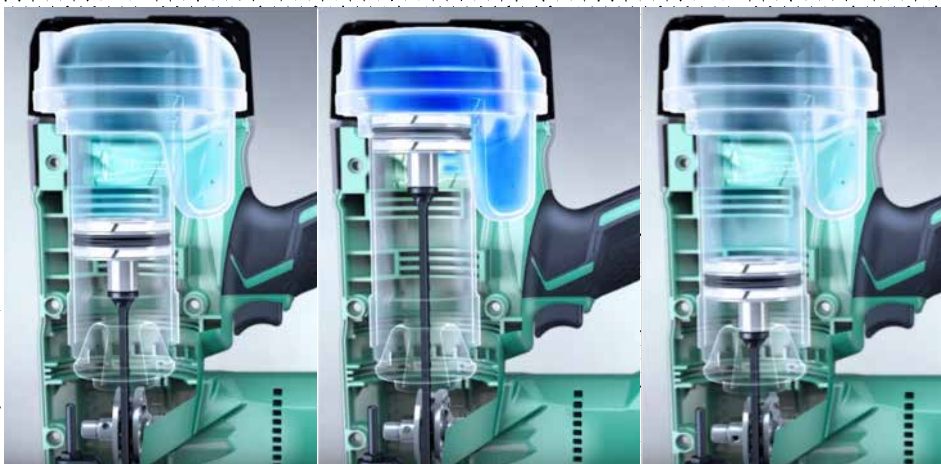

1) At Rest                      2) Start of Drive Cycle                      3) Driving

## **Uses Compressed Air to Drive Each Nail**

- ✔ Zero ramp up time
- ✔ 2-3 nails per second
- ✔ Easy Serviceability
- ✔ Recoil that feels like a pneumatic nailer
- ✔ No refilling of air tank required\*

## **FEELS LIKE PNEUMATIC**



\* Air tank does not require refill unless there is a malfunction of material components that require service center attention.

## **COMPATIBLE BATTERIES**



18V / 1.5Ah



18V / 2.0Ah



18V / 3.0Ah



18V / 4.0Ah



18V/5.0Ah  
36V/2.5Ah



18V/8.0Ah  
36V/4.0Ah

**CORDLESS FREEDOM**


# THE **A5** SERIES *Like The Original* **ADVANTAGES**

- **Lasts Longer**
- **Extended Life Piston**
- **Less downtime**
- **ANSI Compliant**
- **Proven Performance**
- **Better Parts**



## **CYLINDER VALVE DRIVING SYSTEM**

- **Provides Faster Action**
- **Increased Durability**
- **ANSI Compliant for Safety**

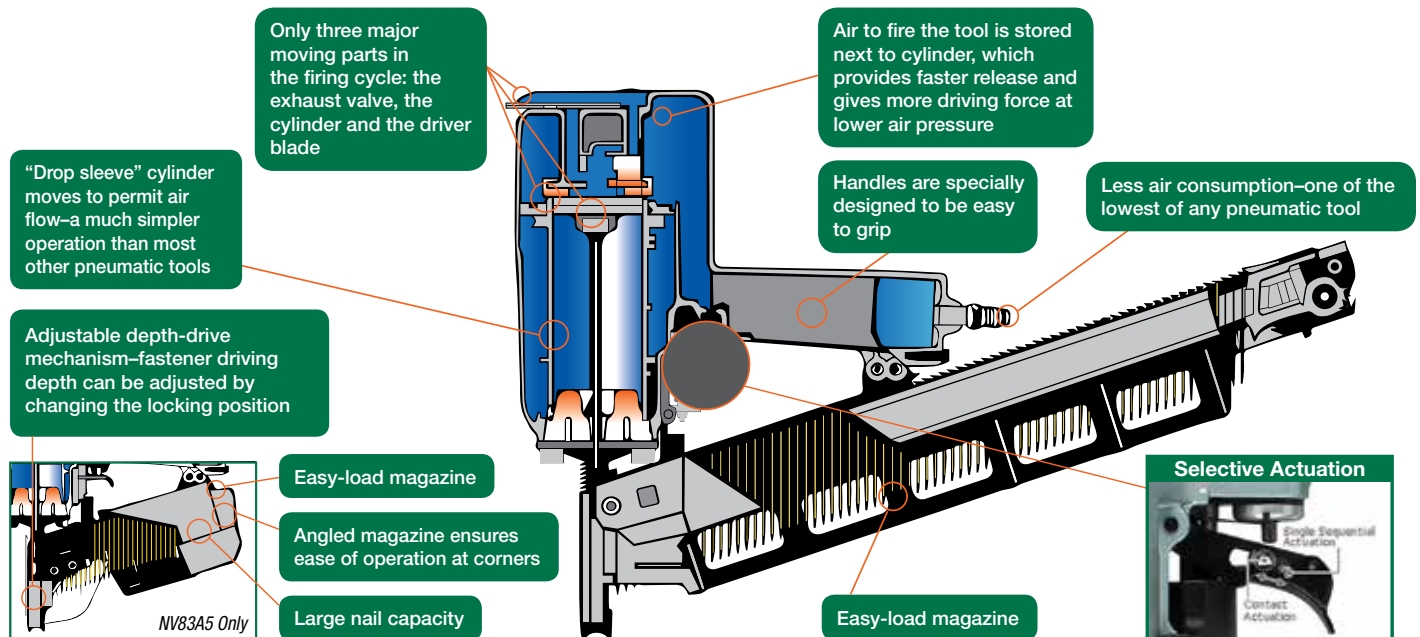

*\*Available on select pneumatic nailers*



# AVAILABLE NOW!



NR83A5(Y)

NR83A5S1

**BONUS**  
*Skinny Bump Trigger*  
included #890658



## NEW

21° 3-1/4"  
**Collated Framing Nailer**  
with **Aluminum Magazine**

- » CONTACT or SINGLE SEQUENTIAL actuation mode via switch in the trigger
- » RAFTER HOOK
- » EASY LOAD
- » RUBBER GRIP for superior control and comfort
- » CLAW TIP resists wear and grips wood for driving nails at different angles
- » OPEN NOSE design for easy extraction should a nail jam
- » 5-YEAR Tool WARRANTY

ALSO AVAILABLE WITHOUT DEPTH OF ADJUSTMENT: NR83A5S1



### NR83A5


#### 3-1/4" Plastic Strip Collated Framing Nailer w/ Depth Adjustment

21°



- Cylinder Valve Drive System for rapid response and increased durability
- Tool-less depth of drive adjustment to flush drive or countersink into varying material
- Selective actuation for either sequential or contact nailing with a simple flip of a switch for tool-less transitions
- Two step nail loading for quick and easy reloads
- Rubber grip for control and comfort during use
- Extended life piston
- Rafter hook included for convenience

Plastic Strip Collation, 21°



#### Specifications

Nail Capacity	50-70
Magazine Angle	21°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight (w/o hook)	8.8 lbs

#### Includes

Rafter Hook (Ass'y)	889661M
Safety Glasses	875769

#### Optionals

No Mar Nose Cap	884080
-----------------	--------



### NR83A5(S)


#### 3-1/4" Plastic Strip Collated Framing Nailer

21°



- Cylinder Valve Drive System for rapid response and increased durability
- Selective actuation for either sequential or contact nailing with a simple flip of a switch for tool-less transitions
- Two step nail loading for quick and easy reloads
- Rubber grip for control and comfort during use
- Extended life piston
- Rafter hook included for convenience

Plastic Strip Collation, 21°



#### Specifications

Nail Capacity	50-70
Magazine Angle	21°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight (w/o hook)	8.8 lbs

#### Includes

Rafter Hook (Ass'y)	889661M
Safety Glasses	875769

#### Optionals

No Mar Nose Cap	884080
-----------------	--------



### NR83A5(Y)


#### 3-1/4" Plastic Strip Collated Framing Nailer w/ Aluminum Magazine & Depth Adjustment

21°



- Cylinder Valve Drive System for rapid response and increased durability
- Tool-less depth of drive adjustment to flush drive or countersink into varying material
- Selective actuation for either sequential or contact nailing with a simple flip of a switch for tool-less transitions
- Two step nail loading for quick and easy reloads
- Rubber grip for control and comfort during use
- Extended life piston
- Rafter hook included for convenience

Plastic Strip Collation, 21°



#### Specifications

Nail Capacity	50-70
Magazine Angle	21°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight (w/o hook)	8.8 lbs

#### Includes

Rafter Hook (Ass'y)	889661M
Safety Glasses	875769

#### Optionals

No Mar Nose Cap	884080
-----------------	--------



### NR83A5(S1)


#### 3-1/4" Plastic Strip Collated Framing Nailer w/ Aluminum Magazine

21°



- Cylinder Valve Drive System for rapid response and increased durability
- Selective actuation for either sequential or contact nailing with a simple flip of a switch for tool-less transitions
- Two step nail loading for quick and easy reloads
- Rubber grip for control and comfort during use
- Extended life piston
- Rafter hook included for convenience

Plastic Strip Collation, 21°



#### Specifications

Nail Capacity	50-70
Magazine Angle	21°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight (w/o hook)	8.8 lbs

#### Includes

Rafter Hook (Ass'y)	889661M
Safety Glasses	875769

#### Optionals

No Mar Nose Cap	884080
-----------------	--------



## FRAMING NAILERS



### NR90AES1

#### 3-1/2" Plastic Strip Collated Framing Nailer


21°



- Lightweight and well-balanced for easy maneuverability
- Tool-less depth of drive adjustment to flush drive or countersink into varying material
- Selective actuation for either sequential or contact nailing with a simple flip of a switch for tool-less transitions
- Two step nail loading for quick and easy reloads

Plastic Strip Collation, 21°

.113 - .148



#### Specifications

Nail Capacity	64-70
Magazine Angle	21°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	7.5 lbs

#### Includes

Safety Glasses	875769
----------------	--------

#### Optionals

No Mar Nose Cap	886401
-----------------	--------



### NR90AC5

#### 3-1/2" Plastic Strip Collated Framing Nailer


21°



- Capable of driving up to 3-1/2" x 0.162" fasteners
- Selective actuation switch allows for quick transitions between sequential and contact nailing with the simple flip of a switch
- Tool-less depth of drive adjustment to flush drive or countersink into varying material
- Two-step nail loading makes fastener replenishment quick and easy, reducing downtime

Plastic Strip Collation, 21°

.113 - .162



#### Specifications

Nail Capacity	64-70
Magazine Angle	21° +/- 1°
Fitting	1/4" Industrial
Operating Pressure	70 - 120 PSI
Weight (w/o hook)	10.1 lbs

#### Includes

Rafter Hook (Ass'y)	889661M
Safety Glasses	875769

#### Optionals

No Mar Nose Cap	884080
-----------------	--------

## NR90AES1

### 3-1/2" Plastic Strip Collated Framing Nailer



### NR1890DRST

#### 3-1/2" 18V MultiVolt Cordless Plastic Strip Collated Framing Nailer

LITHIUM ION  
**LIFETIME**  
TOOL WARRANTY  
**2 YEAR** LIFE-ON BATTERY WARRANTY  
**1 YEAR** CHARGER WARRANTY

**18V**

**21°**

**MV**  
MULTI VOLT

**BRUSH LESS**  
Brushless Motor

INCLUDES METABO RAFTER HOOK




Also available  
NR1890DRS07  
(Bare tool only)



- Air Spring Drive System delivers similar performance to a pneumatic tool
- Drives 2 nails per second
- 600 Nails Per Charge using Metabo HPT's compact 4.0Ah Li-Ion battery
- Dry-fire lockout
- Selective actuation: Contact and sequential modes
- Brushless motor for longer run time per charge, less maintenance and increased durability
- Tool-less depth of drive

Plastic Strip Collation, 21°

.113 - .131



#### Specifications

Volts	18
Nail Capacity	37
Magazine Angle	21°
Nails Per Charge	600
Battery Type	Lithium Ion Slide
Weight (w/ 18V 4.0Ah battery)	9.9 lbs

#### Includes

(1) 18V 4.0Ah Battery BSL1840M	378681M
Rapid Charger	UC18VFSL
Safety Glasses	875769
Carrying Bag	372294M

### NR3690DR

#### 3-1/2" 36V MultiVolt Cordless Plastic Strip Collated Framing Nailer

LITHIUM ION  
**LIFETIME**  
TOOL WARRANTY  
**2 YEAR** LIFE-ON BATTERY WARRANTY  
**1 YEAR** CHARGER WARRANTY

**36V**

**21°**

**MV**  
MULTI VOLT


**BRUSH LESS**  
Brushless Motor



- Air Spring Drive System delivers similar performance to a pneumatic tool
- 900 Nails Per Charge using Metabo HPT's 2.5Ah MultiVolt Li-Ion battery
- Drives 3 nails per second
- Dry-fire lockout
- Selective actuation: Contact and sequential modes
- Brushless motor for longer run time per charge, less maintenance and increased durability
- Tool-less depth of drivecharge, less maintenance and increased durability
- Tool-less depth of drive

Plastic Strip Collation, 21°

.113 - .131



#### Specifications

Volts	36
Nail Capacity	37
Magazine Angle	21°
Nails Per Charge	900
Battery Type	Lithium Ion Slide
Weight (w/ 36V 2.5Ah MV battery)	10.8 lbs

#### Includes

(1) 36V Compact 2.5Ah Battery BSL36A18	371751M
Rapid Charger w USB Port	UC18YRSL
Safety Glasses	875769
3mm Hex Wrench	943277
4mm Hex Wrench	944458
Carrying Bag	372294M



## NR3690DR

### 3-1/2" 36V MultiVolt Cordless Plastic Strip Collated Framing Nailer



## FRAMING NAILERS



### NR83AA5

### 3-1/4" Paper Collated Framing Nailer

30°




Also available: Extended Magazine  
Part# 890309  
(Sold Separately)

- Cylinder Valve Drive System for rapid response and increased durability
- Selective actuation on trigger allows for either sequential or contact nailing
- Open nose design for easy extraction should a nail jam
- Rafter hook included for convenience

CLIPPED & OFFSET ROUND HEAD

Paper Strip Collation,  
Clipped & Offset Round Head, 30°



Specifications	
Nail Capacity	86-94
Magazine Angle	30°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight (w/o hook)	9.0 lbs

Includes	
Rafter Hook (Ass'y)	889661M
Safety Glasses	875769

Optionals	
No Mar Nose Cap	886401



### NR90ADS1

### 3-1/2" Paper Collated Framing Nailer


30°



- Lightweight and well-balanced for easy maneuverability
- Tool free depth of drive adjustment to flush drive or countersink into varying material
- Selective actuation for either sequential or contact fire nailing with a simple flip of a switch for tool-less transitions
- Two step nail loading for quick and easy reloads

CLIPPED & OFFSET ROUND HEAD

Paper Strip Collation,  
Clipped & Offset Round Head, 30°



Specifications	
Nail Capacity	50-74
Magazine Angle	30°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	7.0 lbs

Includes	
Safety Glasses	875769

Optionals	
No Mar Nose Cap	886401

LITHIUM ION  
**LIFETIME**  
TOOL WARRANTY  
**2 YEAR** BATTERY  
WARRANTY  
**1 YEAR** CHARGER  
WARRANTY

18V

30°



Also available  
NR1890DCS07  
(Bare tool only)


### NR1890DCST

### 3-1/2" 18V Cordless Paper Collated Framing Nailer

- Air Spring Drive System delivers similar performance to a pneumatic tool
- Drives 2 nails per second
- 600 Nails Per Charge using Metabo HPT's compact 4.0Ah Li-Ion battery
- Dry-fire lockout
- Selective actuation: Contact and sequential modes
- Brushless motor for longer run time per charge, less maintenance and increased durability
- Tool-less depth of drive

CLIPPED & OFFSET ROUND HEAD

Paper Strip Collation,  
Clipped & Offset Round Head, 30°



Specifications	
Volts	18
Nail Capacity	47
Magazine Angle	30°
Nails Per Charge	600
Battery Type	Lithium Ion Slide
Weight (w/ 18V 4.0Ah battery)	9.9 lbs

Includes	
(1) 18V 4.0Ah Battery BSL1840M	378681M
Rapid Charger UC18YFSL	UC18YFSL
Safety Glasses	875769
Carrying Bag	372294M
Pivoting Rafter Hook	371214

LITHIUM ION  
**LIFETIME**  
TOOL WARRANTY  
**2 YEAR** BATTERY  
WARRANTY  
**1 YEAR** CHARGER  
WARRANTY

36V

30°




### NR3690DC

### 3-1/2" 36V MultiVolt Cordless Framing Nailer

- Air Spring Drive System delivers similar performance to a pneumatic tool
- 900 Nails Per Charge using Metabo HPT's 2.5Ah MultiVolt Li-Ion battery
- Drives 3 nails per second
- Dry-fire lockout
- Selective actuation: Contact and sequential modes
- Brushless motor for longer run time per charge, less maintenance and increased durability
- Tool-less depth of drivecharge, less maintenance and increased durability
- Tool-less depth of drive

Clipped & Offset Round Head, 30°



Specifications	
Volts	36
Nail Capacity	47
Magazine Angle	30°
Nails per Charge	900
Battery Type	Lithium-Ion Slide
Weight	10.8 lbs

Includes	
(1) 36V MultiVolt 2.5Ah Battery (371751M)	BSL36A18
Rapid Charger UC18YRSL	UC18YRSL
Safety Glasses	875769
Carrying Bag	372294M
3mm Hex Wrench	943277
4mm Hex Wrench	944458




### NR90AFS1

#### 3-1/2" Wire Weld Framing Nailer



- Selective actuation for either sequential or contact fire nailing with a simple flip of a switch for tool-less transitions
- Tool-less depth of drive adjustment to flush drive or countersink into varying material
- Dry-fire lockout prevents the nailer from firing when nail count is too low
- Two step nail loading for quick and easy reloads

Wire Weld Collation,  
Offset Round Head, 28°



#### Specifications

Nail Capacity	100
Magazine Angle	28°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	7.3 lbs

#### Includes

Safety Glasses	875769
----------------	--------

#### Optionals

No Mar Nose Cap	886401
-----------------	--------




### NV83A5

#### 3-1/4" Coil Framing Nailer



- Cylinder Valve Drive System for rapid response and increased durability
- Tool-less depth of drive adjustment to flush drive or countersink into varying material
- Selective actuation on trigger allows for either sequential or contact nailing
- Side load pop-out magazine for fast and easy reloads
- Open nose design for easy nail removal
- Rafter hook included for convenience

Coil, Wire Collation, 16°



#### Specifications

Nail Capacity	200-300
Magazine Angle	16° +/- 1°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight (w/o hook)	9.1 lbs

#### Includes

Safety Glasses	875769
Hook Ass'y	889661M




### NV90AGS

#### 3-1/2" Coil Framing Nailer



- Selective actuation switch allows for either sequential or contact nailing with the simple flip of a switch
- Tool-less depth of drive adjustment to flush drive or countersink into varying material
- Side load, tilt bottom magazine for fast and easy reloads
- Lightweight and well balanced

Coil, Wire Collation, 16°



#### Specifications

Nail Capacity	200-300
Magazine Angle	16° +/- 1°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	7.7 lbs

#### Includes

Safety Glasses	875769
----------------	--------

#### Optional

No Mar Nose Cap	883106
-----------------	--------



## NV83A5

### 3-1/4" Coil Framing Nailer



## COIL/SIDING NAILERS



### NV65AH2 2-1/2" Coil Siding Nailer




### NV65AH2

### 2-1/2" Coil Siding Nailer

15°  
COIL NAIL



- Drives both wire collated and plastic sheet collated nails for added flexibility
- Tool-less depth of drive adjustment for precision nailing/flush driving
- Plastic shield deflects wire collation for added safety
- Adjustable air deflector directs the air exhaust in any direction

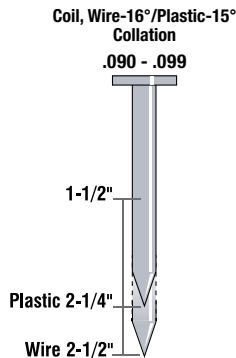

Specifications	
Nail Capacity	200-300
Magazine Angle	16° (Wire) / 15° (Plastic)
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.9 lbs

Includes	
No Mar Nose Cap	878344
Safety Glasses	875769




### NV75A5

### 3" Coil Siding/Framing Nailer

15°  
COIL NAIL



- Drives wire and plastic collated nails
- Side-load, tilt-bottom magazine for fast and easy reloads
- Tool free depth adjustment
- Selective actuation switch
- 360° adjustable exhaust
- Rafter hook

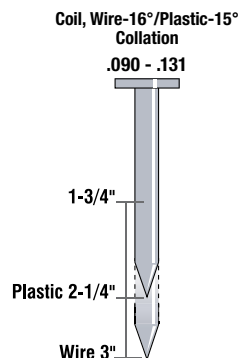

Specifications	
Nail Capacity	200-300
Magazine Angle	16±1°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	5.7 lbs

Includes	
Rafter Hook (Ass'y)	889661M
No Mar Nose Cap	883106
Safety Glasses	875769



### NV45AB2


### 1-3/4" Coil Roofing Nailer

**RF**  
ROOFING NAIL



- Side loading magazine, convenient and easy for quick fastener replenishment
- Tool-less depth of drive adjustment for precision nailing/flush driving
- Carbide tipped push lever reduces wear
- Pneumatic nail feed mechanism powers both the nail advance and return for consistent operation even in the harshest of conditions

Coil, Wire Collation, 16°



#### Specifications

Nail Capacity	120
Magazine Angle	16°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	5.7 lbs

#### Includes

Safety Glasses	875769
----------------	--------

#### Optional

Power Pack Set	877908
----------------	--------



## NV45AB2

### 1-3/4" Coil Roofing Nailer



## METAL CONNECTOR NAILERS



### NR38AK


#### 1-1/2" Strap-Tite® Fastening System Strip Nailer



- Narrow design for ease of use in tight spaces
- Sequential firing mechanism ensures precision nail placement
- Unique positive safety allows tool to use nails as a guide without damaging collation

Paper Strip Collation, 36°

.131 - .148



1-1/2"

#### Specifications

Nail Capacity	29
Magazine Angle	36°
Fitting	1/4" Industrial
Operating Pressure	80-120 psi
Weight	4.6 lbs

#### Includes

Safety Glasses	875769
----------------	--------



### NR65AK2 NR65AK2S

#### 2-1/2" Strap-Tite® Fastening System Strip Nailer




NR65AK2(S)  
Short Magazine

- Narrow design for ease of use in tight spaces
- Sequential firing mechanism ensures precision nail placement
- Unique positive safety allows tool to use nails as a guide without damaging collation

Paper Strip Collation, 36°

.131 - .162



1-1/2"

2-1/2"

#### Specifications

Nail Capacity	44
Nail Capacity NR65AK2(S)	22
Magazine Angle	36°
Fitting	1/4" Industrial
Operating Pressure	80-120 psi
Weight	6.4 lbs
Weight NR65AK2(S)	5.7 lbs

#### Includes

Safety Glasses	875769
----------------	--------

#### Optional

Long Magazine Assembly	883456
Short Magazine Assembly	883469



### NR3665DA


#### 2 1/2" 36V MultiVolt Cordless Strap-Tite® Strip Nailer



- Nail metal connectors without the need for hoses or tanks
- Drives 900 nails per charge using the MultiVolt 36V 2.5Ah Li-Ion Battery
- Accepts 35 degree 1-1/2" and 2-1/2" nails up to 0.612" in diameter
- Strap-Tite Positive Placement Probe Tip allows for easy tip setting at the hole in the metal connector

Metal Connector, 36°

.162



1-1/2"

2-1/2"

#### Specifications

Volts	36
Nail Capacity	31
Magazine Angle	36°
Nails per Charge	900
Battery Type	Lithium-Ion Slide
Weight (with 2.5Ah Battery)	10.6 lbs

#### Includes

(1) 36V MultiVolt 2.5Ah Battery	(371751M) BSL36A18
Rapid Charger	UC18YRSL
Carrying Bag	372294M
Belt Hook	371214



## NR3665DA

2-1/2" 36V MultiVolt Cordless  
Strap-Tite® Strip Nailer






### NV50A1

### 2" Coil Utility Nailer



- High capacity canister holds up to 400 nails for less downtime
- Open magazine canister to quickly check nail quantity
- Angled magazine for ease of use in corner applications
- Plastic shield deflects wire collation for added safety

Coil, Wire Collation, 16°



#### Specifications

Nail Capacity	400
Magazine Angle	16°
Air Inlet	3/8"
Operating Pressure	70-120 psi
Weight	4.2 lbs

#### Includes

Safety Glasses	875769
----------------	--------



### NV65AN NV65ANS


### 2-1/2" Coil Pallet Nailer



**NV65ANS**  
Single Sequential  
Actuation Trigger

- 360° adjustable air deflector directs the air exhaust in any direction and away from the user
- Side load magazine for fast and easy reloads
- Open nose design for easy jam removal
- Clear plastic shield deflects wire collation away from the user for added safety
- Lightweight and well balanced at just 5.9 lbs. for less fatigue

Coil, Wire Collation, 16°



#### Specifications

Nail Capacity	200-300
Magazine Angle	16±1°
Fitting	1/4" Industrial
Operating Pressure	80-120 psi
Weight	5.9 lbs

#### Includes

Sequential Trip Mechanism (NV65AN Only)	888451
Safety Glasses	875769




### NV75AN(S1)

### 3" Coil Pallet Nailer



- Flat nose (safety push lever) for rapid driving as nailer slides across pallet
- Tool-less depth of drive adjustment for precision nailing/flush driving
- 360° adjustable air deflector directs the air exhaust away from the user
- Side load magazine for fast and easy reloads
- Plastic shield deflects wire collation for added safety

Coil, Wire Collation, 16°



#### Specifications

Nail Capacity	200-300
Magazine Angle	16±1°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	6.3 lbs

#### Includes

Safety Glasses	875769
Sequential Trip Mechanism	888451
No Mar Nose Cap	888782




### NH90AB

### 3-1/2" Palm Nailer



- Rubber grip for added comfort and reduced vibration
- 360° swivel plug for maximum flexibility
- Magnetic nose holds nail securely for precise fastener placement
- Drives most common bulk nails including finish, framing and timber

Bulk Nails  
.113 - .162



#### Specifications

Nail Capacity	1
Fitting	1/4" Industrial
Operating Pressure	80-100 psi
Weight	1.3 lbs

#### Includes

Safety Glasses	875769
----------------	--------



## FORMING DUPLEX NAILER

# SAVE TIME!

## IDEAL FOR BUILDING REUSABLE STRUCTURES LIKE CONCRETE FORMS & SCAFFOLDING



# NR3675DD

3-1/2" 36V MultiVolt Cordless Forming Nailer

LITHIUM ION  
**LIFETIME**  
TOOL WARRANTY  
2 YEAR BATTERY WARRANTY  
1 YEAR CHARGER WARRANTY

**36V**

**MULTI VOLT**

**21°**  
DUPLEX NAIL

**PTIA 2020**  
THE INNOVATION AWARDS WINNER

**BRUSH LESS**  
Brushless Motor


### NR3675DD

### 3-1/2" 36V MultiVolt™ Cordless Forming Nailer



**DUPLEX**

- APPLICATIONS: Ideal for building concrete forms and temporary wood structures like concrete forms and scaffolding
- Drives Duplex nails for fast nail extraction
- Powered by 36V MultiVolt™ battery or optional AC adapter (ET36A)
- Air Spring Drive System delivers similar performance to a pneumatic tool
- 900 Nails Per Charge
- Tool-less depth of drive
- Dry-fire lockout
- Selective actuation: Contact and sequential modes



#### Specifications

Volts	36
Nail Capacity	35
Magazine Angle	21°
Nails Per Charge	900
Battery Type	Lithium Ion Slide
Weight (with BSL36A18 battery)	10.8 lbs

#### Includes

(1) 36V Compact 2.5Ah Li-Ion Battery (BSL36A18)	371751M
Charger	UC18YSL3
Safety Glasses	875769
Carrying Bag	372294M

#### ACCEPTS DUPLEX FASTENERS (16D, 8D, 6D)

Provides excellent grip force with easy & quick removal for temporary wood structures

#### SIMPLIFIED CONTROL PANEL

Easy to read and select single fire or bump fire modes

#### DRY FIRE LOCKOUT SYSTEM

Prevents nailer from driving when fasteners are low

#### TOOL-LESS DEPTH OF DRIVE

Precise fastener setting



#### AVAILABLE DUPLEX FASTENERS

Item Code	Description
50214-6D	2-1/4" x .131" SM BS
50234-8D	2-3/4" x .131" SM BS
50312-16D	3-1/2" x .131" SM BS



### NT1865DMAST

2-1/2" 36V MultiVolt Cordless  
15-Ga Angled Finish Nailer



### NT65MA4


2-1/2" 15-Gauge Angled Finish Nailer with Air Duster

15 GA  
ANGLED NAIL



- Equipped with a non-slip elastomer grip trigger and ergonomically designed simple flip selective actuation switch
- Integrated air duster button allows air from the compressor to clear away dust and debris from the work surface in preparation for the nail
- Selective actuation switch lets the user easily select contact or sequential fire modes
- Depth of drive adjustment for accurate nail depth in varying materials

15-Gauge, 34°



#### Specifications

Nail Capacity	100
Magazine Angle	34°
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.2 lbs

#### Includes

Safety Glasses	875769
Case	884340

### NT1865DMAST

2-1/2" 18V MultiVolt Cordless 15-Gauge Angled Finish Nailer

LITHIUM ION  
**LIFETIME**  
TOOL WARRANTY

2 YEAR LEAD BATTERY WARRANTY  
1 YEAR CHARGER WARRANTY

18V  
MULTI VOLT

15 GA  
ANGLED NAIL


BRUSH LESS  
Brushless Motor



Also available  
NT1865DMSQ7  
(Bare tool only)

- Air Spring Drive System delivers similar performance to a pneumatic tool
- 800 nails per charge using 2.0Ah battery
- Selective actuation switch lets the user easily select contact or sequential nailing
- Tool-less depth of drive adjustment
- Integrated belt hook so the tool is always close at hand
- Built-in LED light
- Dry-fire Lockout

15-Gauge, 34°



#### Specifications

Volts	18
Nail Capacity	100
Magazine Angle	34°
Nails Per Charge (w/ 18V 2.0Ah battery)	800 Nails
Battery Type	Lithium Ion Slide
Weight (Tool Only)	6.7 lbs

#### Includes

(1) 18V 2.0Ah Battery BSL1820M	377797M
Rapid Charger	UC18YFSL
No Mar Nose Cap	371094
Safety Glasses	875769
Carrying Bag	371108M



## 16-GA FINISH NAILERS



### NT65A5

#### 2-1/2" 16-Gauge Pro Finish Nailer

16 GA  
STRAIGHT NAIL



- Cylinder valve drive system for rapid response and increased durability
- Accepts 3 strips of nails at a time and a locking feeder system makes replenishment quick and easy
- High grade aluminum and steel magazine provides exceptional durability and protects against jams
- Selective actuation allows for quick changes between sequential and contact nailing
- 360 degree adjustable hook can be mounted in any direction for user preference



#### Specifications

Nail Capacity	150
Magazine Angle	Straight
Operating Pressure	70-120 PSI
Weight (without circle)	4.9 lbs

#### Includes

Safety Glasses	875679
No Mar Tip	881751
Carrying Bag	371108M
Hook Ass'y	889661M




### NT65M2S

#### 2-1/2" 16-Gauge Finish Nailer with Air Duster

16 GA  
STRAIGHT NAIL



- Equipped with a non-slip elastomer grip trigger and ergonomically designed simple flip actuation switch
- Integrated air duster button allows air from the compressor to clear away dust and debris
- Selective actuation switch lets the user easily select contact or sequential fire modes
- Depth of drive dial allows the user to easily adjust the drive depth for a professional finish



#### Specifications

Nail Capacity	100
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	3.7 lbs

#### Includes

Safety Glasses	875679
Case	885676

LITHIUM ION  
**LIFETIME**  
TOOL WARRANTY

**2 YEAR** BATTERY WARRANTY  
**1 YEAR** CHARGER WARRANTY

**18V**

**M**  
MULTI VOLT

16 GA  
STRAIGHT NAIL


**FLASH LESS**  
Brushless Motor

### NT1865DMST

#### 2-1/2" 18V MultiVolt Cordless 16-Gauge Straight Finish Nailer



- Air Spring Drive System delivers similar performance to a pneumatic tool
- 950 nails per charge using 2.0Ah battery
- Selective actuation switch lets the user easily select contact or sequential nailing
- Tool-less depth of drive adjustment
- Integrated belt hook so the tool is always close at hand
- Built-in LED light
- Dry-fire Lockout



#### Specifications

Volts	18
Nail Capacity	100
Magazine Angle	Straight
Nails Per Charge (w/ 18V 2.0Ah battery)	950 Nails
Battery Type	Lithium Ion Slide
Weight (Tool Only)	6.5 lbs

#### Includes

(1) 18V 2.0Ah Battery BSL1820M	377797M
Rapid Charger UC18YFSL	
Safety Glasses	875679
Carrying Bag	371108M

Also available  
NT1865DMSQ7  
(Bare tool only)



**NT65M2S**  
2-1/2" 16-Ga Finish Nailer  
with Air Duster




### NT50A5

#### 2" 18-Gauge Pro Brad Nailer

18 GA  
BRAD NAIL



- Integrated air duster that is easily thumb operated to clear away dust and debris
- Tool-less depth of drive adjustment to countersink or flush drive into a variety of materials
- Automatic dry-fire lockout prevents the nailer from operating when no nails are in the magazine
- Selective Actuation for quick changes between sequential and contact nailing with the simple flip of a switch
- High Grade Aluminum Magazine provides exceptional durability and protects against jams



#### Specifications

Nail Capacity	100
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	2.9 lbs

#### Includes

Safety Glasses	875769
No Mar Tip	885887
Carrying Bag	372210M




### NT50AE2

#### 2" 18-Gauge Brad Nailer

18 GA  
BRAD NAIL



- Equipped with a non-slip elastomer grip trigger and ergonomically designed simple flip selective actuation switch
- Selective actuation switch lets the user easily select contact or sequential fire modes
- Tool-less, easy-to-clear nose for quick and simple nail extraction should a nail jam during use
- Depth of drive dial allows the user to easily adjust the drive depth for a professional finish



#### Specifications

Nail Capacity	100
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	2.2 lbs

#### Includes

Safety Glasses	875769
No Mar Tip	885887
Case	885902

LITHIUM ION  
**LIFETIME**  
TOOL WARRANTY  
**2 YEAR** LIFE-  
TOOL WARRANTY  
**1 YEAR** CHARGER  
WARRANTY

**18V**  
MULTI VOLT

18 GA  
BRAD NAIL


**BRUSH LESS**  
DRILLS & MOTORS

### NT1850DFT

#### 2" 18V MultiVolt Compact Cordless 18-Gauge Brad Nailer



- Air Spring Drive System offers similar performance to a pneumatic nailer
- Powered by Metabo HPT's 2.0Ah Lithium Ion slide-type battery for fade free power
- 1,300 nails per charge with 2.0Ah battery
- Selective actuation switch lets the user contact or sequential nailing
- Tool-less depth of drive adjustment for flush drives into various materials
- Integrated belt hook so tool is close at hand
- Built-in LED light



#### Specifications

Volts	18
Nail Capacity	100
Magazine Angle	Straight
Nails Per Charge (w/ 18V 2.0Ah battery)	1,300
Battery Type	Lithium Ion Slide
Weight (Tool Only)	4.4 lbs

#### Includes

(1) 18V 2.0Ah Battery BSL1820M	377797M
Rapid Charger	UC18YFSL
Safety Glasses	875769
Carrying Bag	371108M

Also available  
NT1850DFQ4  
(Bare tool only)



## NT1850DFT

2" 18V MultiVolt Cordless  
18-Ga Brad Nailer



## 23-GA PIN NAILERS




### NP50A

#### 2" 23-Gauge Pro Pin Nailer

23 GA  
PIN NAIL



- Trigger Lock Switch protects against unintentional use
- Depth of Drive Adjustment to countersink or flush drive into a variety of materials
- Automatic Dry-fire Lockout prevents the nailer from operating with 6 nails or less in the magazine
- High Grade Aluminum Magazine provides exceptional durability and protects against jams
- Sequential Actuation with Dual Triggers ensures accurate pin placement every time



#### Specifications

Nail Capacity	100
Magazine Angle	Straight
Operating Pressure	64-100 PSI
Air Inlet	1/4"
Weight (without hook)	3.3 lbs

#### Includes

Safety Glasses	875769
No Mar Tip (x2)	889621
Lubricant Oil	877153
Carrying Case	




### NP35A

#### 1-3/8" 23-Gauge Micro Pin Nailer

23 GA  
PIN NAIL



- Large fastener capacity for fewer reloads and less downtime
- Dual trigger for safe and accurate placement of fasteners
- Rear exhaust directs oil and debris away from the work surface
- Depth adjustment for flush drives into a variety of surfaces
- Reload indicator for easy visual recognition of low nail quantities to avoid dry firing



#### Specifications

Nail Capacity	100
Magazine Angle	Straight
Operating Pressure	65-100 PSI
Air Inlet	1/4"
Weight	2.0 lbs

#### Includes

Safety Glasses	875769
Case	88752M
Lubricant Oil	877153

LITHIUM ION  
**LIFETIME**  
TOOL WARRANTY  
2 YEAR LITHIUM BATTERY WARRANTY  
1 YEAR CHARGER WARRANTY

**18V**  
MULTI VOLT

23 GA  
PIN NAIL


### NP18DSALT

#### 1-3/8" 18V MultiVolt Cordless 23-Gauge Pin Nailer



Also available  
NP18DSALQ4  
(Bare tool only)

- Powered by Metabo HPT's Compact 2.0Ah Lithium Ion slide-type battery for fade free power
- 2,700 nails per charge with 2.0Ah battery
- Tool-less depth of drive adjustment for flush drives into various materials
- Dry-fire lockout prevents nail activation when pin count is low
- No push tip reduces marring & provides a clean finish



#### Specifications

Volts	18
Nail Capacity	100
Magazine Angle	Straight
Nails Per Charge w/ 18V 2.0Ah battery)	2,700
Battery Type	Lithium Ion Slide
Weight (Tool Only)	3.6 lbs

#### Includes

(1) 18V 2.0Ah Battery BSL1820M	377797M
Rapid Charger	UC18YFSL
Safety Glasses	875769
Carrying Bag	371108M



### NP35A

1-3/8" 23-Ga Micro Pin



### N3804A5


#### 1/4" 18-Gauge Narrow Crown Pro Finish Stapler

18 GA  
NARROW CROWN  
STAPLE



- Integrated air duster that is easily thumb operated to clear away dust and debris
- Tool-less depth of drive adjustment to countersink or flush drive into a variety of materials
- High grade steel magazine provides exceptional durability for easy loading and protects against jams
- Selective actuation allows for quick changes between sequential and contact nailing with flip of a switch
- Quick release nose provides easy access to the nail chamber should a nail jam

18-Gauge



Specifications	
Staple Gauge	18
Staple Capacity	100
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	2.7 lbs

Includes	
Safety Glasses	875769
No Mar Tip	885969
Carrying Bag	372210M



### N3804AB3


#### 1/4" 18-Gauge Narrow Crown Stapler

18 GA  
NARROW CROWN  
STAPLE



- Equipped with a non-slip elastomer grip trigger
- Ergonomically designed simple flip actuation switch allows for either sequential or contact nailing
- Tool free depth adjustment allows for a professional finish with varying materials
- Tool-less, easy to clear nose for quick and simple staple extraction

18-Gauge



Specifications	
Staple Gauge	18
Staple Capacity	100
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	2.3 lbs

Includes	
Safety Glasses	875769
No Mar Tip	885969
Carrying Case	885902



### N1804DA


#### 18V MultiVolt Cordless 1/4" 18-Gauge Narrow Crown Stapler

18 GA  
NARROW CROWN  
STAPLE



- Air Spring Drive System offers similar performance to a pneumatic nailer
- Powered by Metabo HPT's 2.0Ah Lithium Ion slide-type battery for fade free power
- 1,000 staples per charge with 2.0Ah battery
- Tool-less depth of drive adjustment for flush drives into various materials
- Integrated belt hook so tool is close at hand
- Built-in LED light

18-Gauge



Specifications	
Volts	18
Staple Capacity	100
Magazine Angle	Straight
Staples Per Charge (w/ 18V 2.0Ah battery)	1,000
Battery Type	Lithium Ion Slide
Weight (Tool Only)	4.4 lbs

Includes	
(1) 18V 2.0Ah Battery BSL1820M	377797M
Rapid Charger	UC18YFSL
No Mar Tip	377940
Safety Glasses	875769
Carrying Bag	371108M

Also available  
N1804DAQ4  
(Bare tool only)



### N3808AP

#### 7/16" 18-Gauge Cap Stapler

18 GA  
NARROW CROWN  
STAPLE



- Ideal for: roof felt, house wrap and foamboard installation
- 200 cap & staple capacity allows for fewer reloads & more productivity
- Quick-clear jam release increases user efficiency
- Depth of drive adjustment
- Lightweight & compact for easier maneuverability

18-Gauge



1" (25 mm)



Specifications	
Staple Gauge	18
Staple & Cap Capacity	200 each
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.8 lbs

Includes	
Safety Glasses	875769
Contact (Bump) Trigger	889390

## STAPLERS



### N5008AC2

#### 7/16" Standard Crown Stapler


16 GA  
MEDIUM CROWN STAPLE



Also available: Extended Magazine  
Part# 890326  
(Sold Separately)



- Cylinder Valve Drive System for rapid response and increased durability
- High capacity magazine allows for fewer staple replenishments
- Quick-clear jam release increases user efficiency
- Depth of drive adjustment to countersink or flush drive staples



#### Specifications

Staple Gauge	16
Staple Capacity	157
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.4 lbs

#### Includes

Safety Glasses	875769
Hex Bar Wrench (4mm)	944458

#### Optional

Sequential Trip Mechanism	876762
---------------------------	--------




### N5010A

#### 1/2" Standard Crown Stapler

16 GA  
MEDIUM CROWN STAPLE



- Cylinder Valve Drive System for rapid response and increased durability
- High capacity magazine allows for fewer staple replenishments
- Depth of drive control for flush drives into various materials
- Tool-less, easy to clear nose for quick and simple staple extraction



#### Specifications

Staple Gauge	16
Staple Capacity	150
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.4 lbs

#### Includes

Safety Glasses	875769
Hex Bar Wrench (4mm)	944458

#### Optional

Sequential Trip Mechanism	876762
---------------------------	--------




### N5021A

#### 15/16" Wide Crown Stapler

16 GA  
WIDE CROWN STAPLE



- Cylinder Valve Drive System for rapid response and increased durability
- High capacity magazine allows for fewer staple replenishments
- Depth of drive control for flush drives into various materials
- Tool-less, easy to clear nose for quick and simple staple extraction



#### Specifications

Staple Gauge	16
Staple Capacity	150
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.7 lbs

#### Includes

Safety Glasses	875769
----------------	--------

#### Optional

Sequential Trip Mechanism	876762
---------------------------	--------




### N5024A2

#### 1" Wide Crown Stapler

16 GA  
WIDE CROWN STAPLE



- Cylinder Valve Drive System for rapid response and increased durability
- High capacity magazine allows for fewer staple replenishments
- Depth of drive control for flush drives into various materials
- Tool-less, easy to clear nose for quick and simple staple extraction



#### Specifications

Staple Gauge	16
Staple Capacity	157
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	4.7 lbs

#### Includes

Safety Glasses	875769
----------------	--------

#### Optional

Sequential Trip Mechanism	876762
---------------------------	--------



### N5010AB 1/2" Crown Flooring Stapler



### N4004AB


#### 1/4" Crown Flooring Stapler

18<sub>GA</sub>



- Tool-less depth adjustable base from 5/16" to 7/16" for solid hardwood and from 1/2" to 5/8" for engineered hardwoods
- High grade composite magazine provides exceptional durability and protects against jams while minimizing overall tool weight
- Sequential actuation ensures accurate staple placement every time
- 360° adjustable exhaust allows air exhaust to be pointed in any direction

18-Gauge



#### Specifications

Staple Gauge	18
Staple Capacity	100
Magazine Angle	Straight
Fitting	1/4" Industrial
Operating Pressure	70-120 psi
Weight	3.1 lbs

#### Includes

Safety Glasses	875769
Hex Bar Wrench (3mm)	943277
Hex Bar Wrench (4mm)	944458
Air Tool Oil	877153



### N5010AB


#### 1/2" Crown Flooring Stapler

FS  
FLOORING STAPLE



- Tool-less depth adjustable base between 1/2" and 3/4" make this the ideal tool for solid hardwood and engineered hardwood installations
- Top-loading, aluminum magazine provides exceptional durability and allows for quick and easy reloads
- Mallet actuated pneumatic operation ensures easy and accurate staple placement every time
- Detachable long reach handle provides tool control and end-user comfort while operating tool

15.5-Gauge








#### Specifications





Staple Gauge	15.5
Staple Capacity	102
Fitting	1/4" Industrial
Operating Pressure	70-100
Weight	11.2 lbs

#### Specifications

Mallet	890210
Hex Bar Wrench (3mm)	943277
Hex Bar Wrench (4mm)	944458
Hex Bar Wrench (5mm)	944459
Hex Bar Wrench (6mm)	872422
Air Tool Oil	877153
Safety Glasses	875769

## COMPRESSOR COMPARISON

					
Item #	<b>EC28M</b>	<b>EC36DAQ4</b>	<b>EC710S</b>	<b>EC99S</b>	<b>EC914S</b>
Description	Portable 1-Gallon Oil-Free Quiet	36V MultiVolt 2-Gallon Cordless	Portable 6-Gallon Oil-Free Pancake	4-Gallon Portable Electric Twin Stack	THE TANK™ 6-Gallon High Capacity Pancake
Power Supply	120V / 60Hz	36V	120V / 60Hz	120V / 60Hz	120V / 60Hz
Motor Type	Oil-Free Induction	Oil-Free Brushless	Universal Oil-Free	Oil-lubricated Induction	Universal Oil-Free
Max Pressure	125 PSI	135 PSI	150 PSI	135 PSI	200 PSI
Air Delivery @40PSI	1.3 CFM	2.3 CFM	3.8 CFM	3.6 CFM	1.3 CFM
Air Delivery @90PSI	0.8 CFM	1.6 CFM	2.8 CFM	1.6 CFM	4.0 CFM
Tank Type	Hot Dog	Hot Dog	Pancake	Twin Stack	Pancake
Tank Capacity	1-Gallon	2-Gallon	6-Gallon	4-Gallon	6-Gallon
Noise	59 dBA	78.6 dBA	73 dBA	95 dBA	79 dBA
Coupling Socket	1/4" x 1	1/4" x 1	1/4" x 2	1/4" x 1	1/4" x 2
Weight	25.2 lbs	27.3 lbs	38.5 lbs	52.9 lbs	41 lbs

				
Item #	<b>EC1315S</b>	<b>EC2510E</b>	<b>EC2610E</b>	<b>EC2610EA</b>
Description	The TANK™ 8-Gallon Trolley	8-Gallon Gas-Powered Wheeled	8-Gallon Gas-Powered Wheelbarrow	The TANK™ XL 9-Gallon Gas Wheelbarrow
Power Supply	120V / 60Hz	Gasoline	Gasoline	Gasoline
Motor Type	Universal Oil-Free	Honda GX 160/Oil	Honda GX 160/Oil	Honda GX 160/Oil
Max Pressure	225 PSI	145 PSI	145 PSI	145 PSI
Air Delivery @40PSI	6.3 CFM	10.9 CFM	10.8 CFM	11.1 CFM
Air Delivery @90PSI	5.0 CFM	9.6 CFM	9.5 CFM	9.5 CFM
Tank Type	Hot Dog	Wheelbarrow	Wheelbarrow	Wheelbarrow
Tank Capacity	8-Gallon	8-Gallon	8-Gallon	9-Gallon
Noise	93 dBA	102 dBA	102 dBA	79 dBA
Coupling Socket	1/4" x 2	1/4" x 2	1/4" x 2	1/4" x 2
Weight	96 lbs	144 lbs	158 lbs	159 lbs

## 1 YEAR WARRANTY

### EC36DAQ4

36V MultiVolt Cordless Cordless  
2-Gal Hotdog Air Compressor



### EC36DAQ4

2 Gallon 36V MultiVolt Cordless Hotdog Air Compressor (Bare Tool)



- 135 Max PSI, for the power to drive over 1,000 18Ga brad nails on a single charge
- 1.6 CFM @ 90 PSI with a 17-second refill time for less waiting between cycles
- All metal roll cage design for greater durability
- GO anywhere with a 36V MultiVolt battery, or GO all day using the MultiVolt AC Adapter (not included)

#### Specifications

Voltage	36 V
Tank Capacity	2 Gallons
Pressure Cut-In	105 PSI
Pressure Cut-Off	135 PSI
CFM	2.3 @ 40 PSI
	1.6 @ 90 PSI
Weight (bare tool)	27.3 lbs

#### Includes

(2) 1/4" Universal Couplers



## COMPRESSORS



### EC914S

#### 6 Gallon High Capacity 200 PSI Pancake Air Compressor: THE TANK



**THE TANK™**




- At 200 PSI, this compressor offers 25% greater PSI than a basic pancake compressor\*
- 4CFM @ 90 PSI allows for multiple large body nailers to be used on a single compressor
- Lightweight at only 41 lbs, it is 22% lighter compared to a traditional twin-stack compressor\*\*

\*Compared to model EC710S  
\*\*Compared to model EC99S

#### Specifications

Power Output	1.3 Run HP
Power Source	120V / 60Hz
Amps	13.5
Tank Capacity	6 Gallon
Max Pressure	200 PSI
CFM	4.0 @ 90 PSI
Weight	41.0 lbs



### EC1315S

#### 8 Gallon 225 PSI Trolley Air Compressor: THE TANK

**THE TANK™**  
**8 GAL**



- 225 Max PSI provides 38% more usable air\* for more work and less runtime
- 40% more air flow\* with 5.0 CFM @ 90 PSI to operate more tools and provide air to the entire jobsite
- Simultaneously run 3 framing nailers, 4 roofing or siding nailers, and up to 5 finish nailers
- Top mounted air filter reduces issues with dirt ingestion, and rubber tires move smoothly around any jobsite

\*Compared to model EC99S

#### Specifications

Power Output	1.5 Run HP
Amperage	13.5
Tank Capacity	8 Gallons
Max Pressure	225 PSI
CFM	6.3 @ 40 PSI
	5 @ 90 PSI
Weight	93 lbs

#### Includes

(2) 1/4" Universal Couplers



### EC2610EA

#### 9-Gallon Gas Wheelbarrow Compressor: THE TANK XL

**THE TANK™**  
**XL**  
**9-GAL**



- Assembled in the USA
- Powered by a professional grade Honda GX engine
- Solid cast iron cylinder provides industry recognized premium material for long life, consistent compression and low oil carryover
- Oversized oil level site glass allows everyone to monitor the oil level for the pump avoiding pump damage due to lock up from inadequate oil supply

\* The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at a specified rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

#### Specifications

Power Output	5.5 Peak HP* @ 3,600 RPM
Tank Capacity	9 Gallon
Max Pressure	145 PSI
CFM	9.5 @ 90 PSI
	5 @ 100 PSI
Weight	159 lbs

#### Includes

(2) 1/4" Brass Industrial Couplers





### EC28M

#### 1 Gallon Quiet Compressor



- Ultra quiet operation at only 59 dB's
- Quiet industrial oil-free pump provides high durability with no maintenance
- Motor Overload Protection stops the motor in a possible overload situation
- Stainless steel braided discharge hose resist corrosion and remains flexible
- Compact and lightweight for easy transport

#### Specifications

Power Output	0.5 Run HP
Tank Capacity	1 Gallon
Amps	2.8
Max Pressure	125 PSI
CFM	0.8 @ 90 PSI
Weight	25.2 lbs



### EC99S

#### Portable 4 Gallon Twin Stack Air Compressor



- Motor Thermal Overload Protection stops the motor in a possible overheating situation
- Cast iron, oil lubricated pump for cooler operation and greater longevity
- 15 Amp direct drive induction motor for efficient and reliable performance
- Locking regulator ensures the proper pressure is delivered to your tool
- Industrial air pressure gauges, encased in steel for higher durability
- 105 On/135 Off pressure switch for less cycling
- Universal quick coupler for fast tool changes

#### Specifications

Power Output	2.0 Run HP
Tank Capacity	4 Gallon
Amps	15
Max Pressure	135 PSI
CFM	3.1 @ 90 PSI
Weight	52.9 lbs

#### Includes

Synthetic Oil (SAE15W40 8oz.)	115337M
Oil Dipstick	881469



### EC710S

#### 6 Gallon Pancake Air Compressor



- Motor Thermal Overload Protection stops the motor in a possible overheating situation
- Industrial oil-free pump provides high durability with no-maintenance
- Industrial air pressure gauges, encased in steel, for higher durability
- Two universal quick couplers for fast tool changes
- 2.8 CFM @ 90 PSI, 150 Max PSI

#### Specifications (EC710 Compressor)

Power Output	1.0 Run HP
Tank Capacity	6 Gallon
Amps	12
Max Pressure	150 PSI
CFM	2.8 @ 90 PSI
Weight	38.5 lbs



**EC99S**  
Portable 4-Gal  
Twin Stack Air Compressor

## COMPRESSORS / RESERVE AIR TANK



### EC2510E

#### 8 Gallon Gas Powered Wheeled Air Compressor



- Powered by a professional grade Honda GX engine
- Solid cast iron cylinder provides industry recognized premium material for long life, consistent compression and low oil carryover
- Oversized oil level site glass allows everyone to monitor the oil level for the pump avoiding pump damage due to lock up from inadequate oil supply
- \* The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at a specified rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

#### Specifications

Power Output	5.5 Peak HP* @ 3,600 RPM
Tank Capacity	8 Gallon
Pump RPM	1,700
Motor RPM	3,200 RPM
Max Pressure	145 PSI
CFM	9.3 @ 90 PSI
Weight	190 lbs

#### Includes

Breather Pipe Plug	885483
Wheel	160616



### EC2610E

#### 8 Gallon Gas Powered Wheeled Air Compressor



- Powered by a professional grade Honda GX engine
- Solid cast iron cylinder provides industry recognized premium material for long life, consistent compression and low oil carryover
- Oversized oil level site glass allows everyone to monitor the oil level for the pump avoiding pump damage due to lock up from inadequate oil supply
- \* The power rating of the engine indicated in this document is the net power output tested on a production engine for the engine model and measured in accordance with SAE J1349 at a specified rpm. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

#### Specifications

Power Output	5.5 Peak HP* @ 3,600 RPM
Tank Capacity	8 Gallon
Pump RPM	1,000
Motor RPM	3,600 RPM
Max Pressure	145 PSI
CFM	9.5 @ 90 PSI
Weight	170 lbs

#### Includes

Breather Pipe Plug	888895
Wheel	160616



### UA3810AB

#### 10 Gallon ASME Certified Reserve Air Tank



- Industrial Ball (Shut-off) Valve on Input allows tank to be filled and disconnected from compressor without it draining itself
- 5 Quick Connect Couplers allow for easy one handed connections of hoses and/or splitters
- Roll Cage Design protects regulator and gauges
- Industrial Pressure Gauges are encased in steel for high durability
- Angled Steel Legs provide additional support, stability, and increase durability despite the abuse endured by hostile jobsite use
- Professional 1 Year Warranty for peace of mind

#### Specifications

Tank Type	Keg
Tank Capacity	10 Gallon
Max Pressure	175 PSI
No. of Outputs	5
No. of Inputs	1
Dimensions (L x W x H)	23" x 13" x 20"
Weight	39.5 lbs

#### Includes

(4) 1/4" Universal Couplers



## UA3810B

10-Gal ASME Certified  
Reserve Air Tank



### UC18YSL3B1

#### 36V/18V MultiVolt™ Slide Battery & Charger Starter Kit

2 YEAR LIMITED WARRANTY  
1 YEAR CHARGER WARRANTY



#### FEATURES

##### BACKWARDS COMPATIBLE

- Works on all 18V & 36V MultiVolt slide-type Tools

##### MULTIPLEX PROTECTION CIRCUIT

- Prevents over-load, over-charge & over-discharge

##### RAPID CHARGER

- Charges 18V/36V MultiVolt™ 8.0Ah/4.0Ah battery in approximately 52 minutes for less down time

##### INCLUDES

- 18V/36V MultiVolt battery (8.0Ah/4.0Ah) (372121M)
- Rapid charger (UC18YSL3M)

### UC18YKSLs

#### 18V 2.0Ah Slide Battery & Charger Combo Kit

2 YEAR LIMITED WARRANTY  
1 YEAR CHARGER WARRANTY



UC18YKSLs

#### FEATURES

##### FUEL GAUGE

- On battery for convenience

##### MULTIPLEX PROTECTION CIRCUIT

- Prevents over-load, over-charge & over-discharge

##### RAPID CHARGER

- Charges 2.0Ah 18V Lithium-Ion Battery in less than 60 minutes

##### INCLUDES

- (2) 18V 2.0Ah batteries (377797M)
- Rapid charger (UC18YKSL)

### UC18YSL3S

#### 18V 3.0Ah Slide Battery & Charger Combo Kit

2 YEAR LIMITED WARRANTY  
1 YEAR CHARGER WARRANTY



UC18YSL3S

#### FEATURES

##### USB PORT

- Charges smartphones and other mobile devices for added convenience

##### MULTIPLEX PROTECTION CIRCUIT

- Prevents over-load, over-charge & over-discharge

##### RAPID CHARGER

- Charges 3.0Ah 18V Lithium-Ion Battery in less than 30 minutes

##### INCLUDES

- (2) 18V Lithium-Ion compact 3.0Ah batteries (339782M)
- Rapid charger (UC18YSL3M)

## UC18YKSLs

18V 2.0Ah Slide Battery & Charger Combo Kit



## CORDLESS ACCESSORIES

### MULTIVOLT™ LITHIUM-ION BATTERIES & AC/DC ADAPTER



Voltage	Stock Code	Number	Type	Amp Hours	Weight
36 V	ET36A	—	AC/DC Adapter with Cord	—	5.5 lbs
36 V / 18 V	372121M	BSL36B18	Li-Ion Slide	4.0Ah / 8.0Ah	2.3 lbs
	371751M	BSL36A18	Li-Ion Slide	2.5Ah / 5.0Ah	1.54 lbs

#### JOBSITE FLEXIBILITY!



**ET36A**  
(36V AC/DC Adapter w/ Cord)  
Works on all 36V tools



**372121M**  
(18V/36V 8.0Ah/4.0Ah)



**371751M**  
(18V/36V 5.0Ah/2.5Ah)

### 18V LITHIUM-ION BATTERIES

Voltage	Stock Code	Number	Type	Amp Hours	Weight
18 V	377797M	BSC1820M	Li-Ion Slide	2.0Ah	0.84 lbs
18 V	339782M	BSL1830C	Compact Li-Ion Slide	3.0Ah	0.97 lbs
18 V	378681M	BSL1840M	Li-Ion Slide	4.0Ah	1.3 lbs



**377797M**  
(2.0Ah w/ Fuel Gauge)



**339782M**  
(3.0Ah)



**378681M**  
(4.0Ah w/ Fuel Gauge)

### SLIDE-STYLE BATTERY CHARGERS



**UC18YKSL**



**UC18YSL3**



**UC18YTSL**  
(4 Port Charger)

Stock Code	Voltage	Time	Type	Battery
UC18YKSL	18V/36V	40 - 150 Min	Li-Ion Slide	333353M / 339782M
UC18YSL3	18V/36V	15 - 38 Min	Li-Ion Slide	339782M / 371751M / 372121M
UC18YTSL	14.4V/18V/36V	30-120 Min	Li-Ion Slide	371751M / 377797M / 339782M / 333353M / 372121M (Charges up to 4 batteries)



**UC18YTSL**  
4 Port 18V/36V Li-Ion  
Battery Charger with USB Ports

# USE GENUINE METABO HPT FASTENERS

**- CONSISTENT QUALITY - ICC RECOGNIZED  
- CONTRACTOR PREFERRED**

*Framing, Roofing,  
Siding, & Specialty*

*Finish & Stapling*

**15°**  
COIL NAIL

**15°**  
COIL SIDING NAIL

**21°**  
ROUND HEAD NAIL

**21°**  
DUPLEX NAIL

**28°**  
WIRE WELD NAIL

**30°**  
FULL HEAD NAIL

**CS**  
COLLATED SCREW

**MC**  
METAL CONNECTOR  
NAIL

**RF**  
ROOFING NAIL

**15**<sub>GA</sub>  
ANGLED NAIL

**16**<sub>GA</sub>  
STRAIGHT NAIL

**16**<sub>GA</sub>  
MEDIUM CROWN  
STAPLE

**16**<sub>GA</sub>  
WIDE CROWN  
STAPLE

**18**<sub>GA</sub>  
BRAD NAIL

**18**<sub>GA</sub>  
NARROW CROWN  
STAPLE

**23**<sub>GA</sub>  
PIN NAIL





### Fastener Coating Key:

- Basic Bright
- Heat Treated / Hardened
- Electro Galvanized
- Hot Dipped Galvanized
- Stainless Steel

21°

### FULL ROUND HEAD PLASTIC STRIP NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
○ 1000HPT	1-1/2" x .148 SM BS	-	-	5	48
○ 10100HPT	2" x .113 SM BS	-	-	6	48
○ 10122HPT	2" x .113 RG BS	-	-	6	48
○ 10134HPT	2-1/8" x .148 SM BS	-	-	4	48
○ 10135HPT	2-1/4" x .148 SM BS	-	-	4	48
○ 10102HPT	2-3/8" x .113 SM BS	-	-	5	48
○ 10102MHPT	2-3/8" x .113 SM BS	-	-	2	96
○ 10103HPT	2-3/8" x .113 RG BS	-	-	5	48
○ 10103MHPT	2-3/8" x .113 RG BS	-	-	2	96
○ 10203HPT	2-3/8" x .113 SC BS	-	-	5	48
○ 20103SHPT	2-3/8" x .113 RG BS	4	1	4	60
○ 10143HPT	2-3/8" x .148 SM BS	-	-	4	48
○ 10143MHPT	2-3/8" x .148 SM BS	-	-	2	96
○ 10144HPT	2-3/8" x .148 RG BS	-	-	4	48
○ 10244HPT	2-3/8" x .148 SC BS	-	-	4	48
○ 20143SHPT	2-3/8" x .148 SM BS	4	1	4	48
○ 10131HPT	2-1/2" x .131 RG BS	-	-	5	48
○ 10132HPT	2-1/2" x .131 SM BS	-	-	5	48
○ 10132MHPT	2-1/2" x .131 SM BS	-	-	2	96
○ 20132SHPT	2-1/2" x .131 SM BS	4	1	4	60
○ 20127HPT	2-3/4" x .120 SC BS	-	-	4	48
○ 10105HPT	3" x .120 SM BS	-	-	4	48
○ 10105MHPT	3" x .120 SM BS	-	-	2	96
○ 10124HPT	3" x .120 SC BS	-	-	4	48
○ 10133HPT	3" x .120 RG BS	-	-	4	48
○ 20105SHPT	3" x .120 SM BS	4	1	4	48
○ 10110HPT	3" x .131 SM BS	-	-	4	48
○ 10110MHPT	3" x .131 SM BS	-	-	2	96
○ 10186HPT	3" x .131 RG BS	-	-	4	48
○ 20110SHPT	3" x .131 SM BS	4	1	4	48
○ 10136HPT	3" x .148 SM BS	-	-	4	48
○ 10107HPT	3-1/4" x .120 SM BS	-	-	4	48
○ 10109HPT	3-1/4" x .131 SC BS	-	-	4	48
○ 10111HPT	3-1/4" x .131 SM BS	-	-	4	48
○ 10111MHPT	3-1/4" x .131 SM BS	-	-	2	96
○ 20111SHPT	3-1/4" x .131 SM BS	4	1	4	48
○ 10138HPT	3-1/4" x .148 SM BS	-	-	3	48
○ 10138MHPT	3-1/4" x .148 SM BS	-	-	2	96
○ 20138SHPT	3-1/4" x .148 SM BS	4	1	4	48
○ 10120HPT	3-1/2" x .131 SM BS	-	-	4	48
○ 10140HPT	3-1/2" x .162 SM BS	-	-	3	48
● 10198HPT	2-1/4" x .120 SC HT	-	-	5	48
● 10199HPT	2-1/4" x .120 SM HT	-	-	5	48
● 10123HPT	2" x .113 RG EG	-	-	6	48
● 10104HPT	2-3/8" x .113 SM EG	-	-	5	48
● 10112HPT	2-3/8" x .113 RG EG	-	-	5	48
● 10155HPT	2-1/2" x .131 SM EG	-	-	5	48
● 10106HPT	3" x .120 SC EG	-	-	4	48
● 10113HPT	3" x .120 SM EG	-	-	4	48
● 10117HPT	3" x .120 RG EG	-	-	4	48
● 10115HPT	3" x .131 SM EG	-	-	4	48
● 10119HPT	3-1/4" x .120 SC DP EG	-	-	4	48
● 10116HPT	3-1/4" x .131 SM EG	-	-	4	48

### Fastener Description Key:

- AL = Aluminum
- BS = Basic Bright
- EG = Electro Galvanized
- HDG = Hot Dipped Galvanized
- HT = Heat Treated or Hardened
- SS = Stainless Steel
- SM = Smooth Shank
- RG = Ring Shank
- SC = Screw Shank
- FC = Fiber Cement Nail
- BL = Blunt Point
- DP = Diamond Point

21°

### FULL ROUND HEAD PLASTIC STRIP NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
● 10171MHPT	2" x .113 RG HDG	-	-	2	96
● 20171SHPT	2" x .113 RG HDG	4	1	4	60
● 10301HPT	2-1/4" x .148 SM HDG	-	-	4	48
● 10159HPT	2-3/8" x .113 SC DP HDG	-	-	5	48
● 10160HPT	2-3/8" x .113 SM HDG	-	-	5	48
● 10161HPT	2-3/8" x .113 RG HDG	-	-	5	48
● 10161MHPT	2-3/8" x .113 RG HDG	-	-	2	96
● 20161SHPT	2-3/8" x .113 RG HDG	4	1	4	60
● 10307HPT	2-3/8" x .148 SM HDG	-	-	4	48
● 10168HPT	2-1/2" x .131 SM HDG	-	-	4	48
● 10311HPT	2-1/2" x .131 RG HDG	-	-	4	48
● 10165HPT	3" x .120 SC DP HDG	-	-	4	48
● 10165MHPT	3" x .120 SC DP HDG	-	-	2	96
● 10300HPT	3" x .120 SM HDG	-	-	4	48
● 10302HPT	3" x .120 RG HDG	-	-	4	48
● 10302MHPT	3" x .120 RG HDG	-	-	2	96
● 20302SHPT	3" x .120 RG HDG	4	1	4	48
● 10162HPT	3" x .131 SM HDG	-	-	4	48
● 10162MHPT	3" x .131 SM HDG	-	-	2	96
● 10167HPT	3" x .148 SM HDG	-	-	4	48
● 10166HPT	3-1/4" x .120 SC DP HDG	-	-	4	48
● 10166MHPT	3-1/4" x .120 SC DP HDG	-	-	2	96
● 10309HPT	3-1/4" x .120 RG HDG	-	-	4	48
● 10309MHPT	3-1/4" x .120 RG HDG	-	-	2	96
● 10163HPT	3-1/4" x .131 SM HDG	-	-	4	48
● 10163MHPT	3-1/4" x .131 SM HDG	-	-	2	96
● 10306HPT	3-1/4" x .131 SC HDG	-	-	4	48
● 20163SHPT	3-1/4" x .131 SM HDG	4	1	4	48
● 10164HPT	3-1/2" x .131 SM HDG	-	-	4	48
● 10303HPT	3-1/2" x .162 SM HDG	-	-	3	48
● 10148SHPT	2" x .113 RG 304 SS	4	1	4	60
● 10150SHPT	2-3/8" x .113 RG 304 SS	4	1	4	48
● 10151SHPT	3" x .120 RG 304 SS	4	1	4	48
● 10152SHPT	4" x .131 RG 304 SS	4	1	4	48
● 10153SHPT	3-1/4" x .120 RG 304 SS	4	1	4	48

21°

### PLASTIC STRIP BALLISTIC FASTENERS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
● 17640HPT	8 x 1-3/4" Threaded SC EG	4	1	4	48
● 17641HPT	8 x 2" Threaded SC EG	4	1	4	48
● 17644HPT	8 x 2-1/4" Threaded SC EG	4	1	4	48
● 17642HPT	8 x 2-1/2" Threaded SC EG	4	1	4	48
● 17643HPT	8 x 2-3/4" Threaded SC EG	4	1	4	48
● 17645HPT	8 x 3" Threaded SC EG	4	1	4	48



**NR83A5**  
3-1/4" Plastic Strip Framing Nail

#### ALSO FITS:

- NR83A2
- NR83A3
- NR83A3(S)
- NR83A5Y
- NR83A5S1
- NR90AE(S1)
- NR1890DR
- NR1890DRS
- NR1890DRST

Fits most round head plastic strip collated framing nailers

## Fastener Coating Key:

- Basic Bright
- Hot Dipped Galvanized
- Heat Treated / Hardened
- Stainless Steel
- Electro Galvanized

## 30° CLIPPED HEAD PAPER TAPE NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
○ 15111MHPT	2" x .113 SM BS	-	-	2	120
○ 15112MHPT	2" x .113 RG BS	-	-	2	120
○ 15116HPT	2" x .120 RG BS	-	-	4.8	80
○ 15102MHPT	2-3/8" x .113 SM BS	-	-	2	120
○ 15103MHPT	2-3/8" x .113 RG BS	-	-	2	120
○ 15100HPT	2-3/8" x .120 SM BS	-	-	4.8	80
○ 15101HPT	2-3/8" x .120 RG BS	-	-	4.8	80
○ 15104HPT	2-3/4" x .120 RG BS	-	-	4.8	80
○ 15105HPT	3" x .120 SM BS	-	-	2.5	84
○ 15125HPT	3" x .120 RG BS	-	-	2.5	84
○ 15108HPT	3" x .131 RG BS	-	-	2.5	84
○ 15109HPT	3" x .131 SM BS	-	-	2.5	84
○ 15107HPT	3-1/4" x .120 SM BS	-	-	2.5	84
○ 15110HPT	3-1/4" x .131 SM BS	-	-	2.5	84
○ 15126HPT	3-1/2" x .131 SM BS	-	-	2.5	84
● 15130MHPT	2" x .113 RG HDG	-	-	2	120
● 15131MHPT	2" x .113 SM HDG	-	-	2	120
● 15132HPT	2-3/8" x .120 SM HDG	-	-	4.8	80
● 15133HPT	2-3/8" x .120 RG HDG	-	-	4.8	80
● 15136HPT	3" x .120 SM HDG	-	-	2.5	84
● 15137HPT	3" x .120 RG HDG	-	-	2.5	84
● 15138HPT	3" x .131 SM HDG	-	-	2.5	84
● 15139HPT	3" x .131 RG HDG	-	-	2.5	84
● 15140HPT	3-1/4" x .120 SM HDG	-	-	2.5	84
● 15141HPT	3-1/4" x .120 RG HDG	-	-	2.5	84
● 15142HPT	3-1/4" x .131 SM HDG	-	-	2.5	84
● 15143HPT	3-1/4" x .131 RG HDG	-	-	2.5	84
● 15144HPT	3-1/2" x .131 SM HDG	-	-	2.5	84
● 15145HPT	3-1/2" x .131 RG HDG	-	-	2.5	84

## 30° OFFSET ROUND HEAD PAPER TAPE NAILS

○ 15202MHPT	2-3/8" x .113 SM BS	-	-	2	96
○ 15203MHPT	2-3/8" x .113 RG BS	-	-	2	96
○ 15200HPT	2-3/8" x .120 SM BS	-	-	4.8	80
○ 15201HPT	2-3/8" x .120 RG BS	-	-	4.8	80
○ 15205HPT	3" x .120 SM BS	-	-	2.5	84
○ 15209HPT	3" x .131 SM BS	-	-	2.5	84
○ 15210HPT	3-1/4" x .131 SM BS	-	-	2.5	84
● 15231MHPT	2-3/8" x .113 RG HDG	-	-	2	96
● 15233HPT	2-3/8" x .120 RG HDG	-	-	4.8	80
● 15237HPT	3" x .120 RG HDG	-	-	2.5	84
● 15238HPT	3" x .131 SM HDG	-	-	2.5	84
● 15242HPT	3-1/4" x .131 SM HDG	-	-	2.5	84



**NR83AA5**  
3-1/4" Paper Collated Framing Nail

### ALSO FITS:

NR83AA4  
NR90AD(S1)  
NR1890DC  
NR1890DCS  
NR1890DCST

Fits most clipped head paper collated framing nailers

## Fastener Description Key:

- AL = Aluminum
- BS = Basic Bright
- EG = Electro Galvanized
- HDG = Hot Dipped Galvanized
- HT = Heat Treated or Hardened
- SS = Stainless Steel
- SM = Smooth Shank
- RG = Ring Shank
- SC = Screw Shank
- FC = Fiber Cement Nail
- BL = Blunt Point
- DP = Diamond Point

## MC PAPER TAPE STRAP TITE NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
● 17121HPT	1-1/2" x .131 SM HT BS	-	-	4	96
● 17124HPT	1-1/2" x .148 SM HT BS	-	-	3	96
● 17126HPT	2-1/2" x .131 SM HT BS	-	-	2.5	96
● 17127HPT	2-1/2" x .148 SM HT BS	-	-	2.5	96
● 17130HPT	2-1/2" x .162 SM HT BS	-	-	2	96
● 17100HPT	1-1/2" x .131 SM HT EG	-	-	4	96
● 17104HPT	1-1/2" x .148 SM HT EG	-	-	3	96
● 17131HPT	1-1/2" x .131 SM HT HDG	-	-	4	96
● 17134HPT	1-1/2" x .148 SM HT HDG	-	-	3	96
● 17136HPT	2-1/2" x .131 SM HT HDG	-	-	2.5	96
● 17137HPT	2-1/2" x .148 SM HT HDG	-	-	2.5	96
● 17140HPT	2-1/2" x .162 SM HT HDG	-	-	2	96
● 27134SHPT	1-1/2" x .148 SM HT HDG	4	1	4	60



**NR65AK2**  
2-1/2" Strap-Tite System Strip Nailer

### ALSO FITS:

NR65AK2(S)  
NR38AK  
NR3665DA



## 21° PLASTIC STRIP DUPLEX NAILS

○ 50214-6D	2-1/4" x .131 SM BS	-	-	2	80
○ 50234-8D	2-3/4" x .131 SM BS	-	-	2	80
○ 50312-16D	3-1/2" x .131" SM BS	-	-	2	80



**NR3675DD**  
3" 36V MultiVolt™ Cordless Plastic Strip Duplex Nailer



### Fastener Coating Key:

- Basic Bright
- Heat Treated / Hardened
- Electro Galvanized
- Hot Dipped Galvanized
- Stainless Steel



### ROUND HEAD WIRE COIL ROOFING NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
● 12108HPT	7/8" x .120 SM EG	-	-	7.2	56
● 12100HPT	1" x .120 SM EG	-	-	7.2	56
● 12101HPT	1-1/4" x .120 SM EG	-	-	7.2	48
● 12111HPT	1-1/4" x .120 SM EG, High Wire	-	-	7.2	48
● 12102HPT	1-1/2" x .120 SM EG	-	-	7.2	40
● 12103HPT	1-3/4" x .120 SM EG	-	-	7.2	40
● 12112HPT	1-1/2" x .120 SM EG	-	-	7.2	40
● 12113HPT	1-3/4" x .120 SM EG	-	-	7.2	40



Fits most full round head wire coil roofing nailers



NV45AB2  
1-3/4" Coil Roofing Nailer

### ROUND HEAD MINI WIRE COIL NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
○ 12301HPT	1-1/4" x .083 RG BS	-	-	16	40
○ 12305HPT	1-1/2" x .083 SM BS	-	-	16	40
○ 12306HPT	1-1/2" x .083 RG BS	-	-	16	40
○ 12311HPT	1-3/4" x .083 RG BS	-	-	16	40
○ 12315HPT	2" x .083 SM BS	-	-	12	40
○ 12316HPT	2" x .083 RG BS	-	-	12	40
● 12302HPT	1-1/4" x .083 RG EG	-	-	16	40
● 12307HPT	1-1/2" x .083 RG EG	-	-	16	40
● 12312HPT	1-3/4" x .083 RG EG	-	-	16	40
● 12317HPT	2" x .083 RG EG	-	-	12	40
● 12322HPT	1-1/2" x .083 RG 304 SS	4	1.4	5.6	36
● 12321HPT	2" x .083 RG 304 SS	4	1.4	5.6	36



Fits most round head mini wire coil nailers



NV50A1  
2" Coil Utility Nailer

### PLASTIC-CAP ROUND HEAD WIRE COIL NAILS

● 12343HPT	1-1/4" x .083 RG EG	-	-	2.8	75
------------	---------------------	---	---	-----	----



### METAL-CAP ROUND HEAD WIRE COIL NAILS

● 12345HPT	2" x .083 RG EG	-	-	2.8	75
------------	-----------------	---	---	-----	----

FITS:

NV50AP2  
NV50AP3

### Fastener Description Key:

- AL = Aluminum
- BS = Basic Bright
- EG = Electro Galvanized
- HDG = Hot Dipped Galvanized
- HT = Heat Treated or Hardened
- SS = Stainless Steel
- SM = Smooth Shank
- RG = Ring Shank
- SC = Screw Shank
- FC = Fiber Cement Nail
- BL = Blunt Point
- DP = Diamond Point



### ROUND HEAD PLASTIC SHEET COIL NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
○ 13310HPT	1-7/8" x .092 RG AL	-	-	6	30
● 13304HPT	1-3/4" x .086 RG EG	-	-	6	30
● 13306HPT	1-7/8" x .099 SM EG	-	-	6	30
● 13313HPT	2" x .092 RG EG	-	-	6	30
● 13321HPT	2-1/4" x .092 SM EG	-	-	4.8	30
● 13320HPT	2-1/4" x .092 RG EG	-	-	4.8	30
● 13305HPT	1-3/4" x .092 RG HDG	-	-	6	30
● 13375HPT	2" x .092 SM HDG FC	-	-	6	30
● 13376HPT	2" x .092 RG HDG FC	-	-	6	30
● 13385HPT	2-1/4" x .092 RG HDG FC	-	-	4.8	30
● 13388HPT	2-1/4" x .092 SM HDG FC	-	-	4.8	30
● 13389HPT	2-1/2" x .092 SM HDG FC	-	-	4.8	30
● 13390HPT	2-1/2" x .092 RG HDG FC	-	-	4.8	30
● 13391HPT	3" x .113 SM HDG FC	-	-	4.8	30
● 13386HPT	2-1/4" x .092 SM 304 SS FC	2	2.4	4.8	30
● 13387HPT	2-1/4" x .092 RG 304 SS FC	2	2.4	4.8	30



### ROUND HEAD WIRE COIL SIDING NAILS

● 13334HPT	1-3/4" x .092 RG EG	-	-	3.6	60
● 13333HPT	2" x .092 SM EG	-	-	3.6	60
● 13335HPT	2" x .092 RG EG	-	-	3.6	60
● 13338HPT	2-1/4" x .092 RG EG	-	-	3.6	60
● 13339HPT	2-1/4" x .092 SM EG	-	-	3.6	60
● 13340HPT	2-1/2" x .092 RG EG	-	-	3.6	60
● 13361HPT	1-1/4" x .092 RG HDG	-	-	3.6	60
● 13362HPT	1-1/2" x .092 RG HDG	-	-	3.6	60
● 13363HPT	1-3/4" x .092 RG HDG	-	-	3.6	60
● 13364HPT	2" x .092 SM HDG	-	-	3.6	60
● 13365HPT	2" x .092 RG HDG	-	-	3.6	60
● 13366HPT	2-1/4" x .092 SM HDG	-	-	3.6	60
● 13367HPT	2-1/4" x .092 RG HDG	-	-	3.6	60
● 13369HPT	2-1/2" x .092 RG HDG	-	-	3.6	60
● 13348HPT	1-1/4" x .090 RG 304 SS	4	0.9	3.6	48
● 13349HPT	1-1/2" x .090 RG 304 SS	4	0.9	3.6	48
● 13350HPT	1-3/4" x .090 RG 304 SS	4	0.9	3.6	48
● 13355HPT	2" x .090 RG 304 SS	4	0.9	3.6	48
● 13352HPT	2-1/4" x .090 RG 304 SS	4	0.9	3.6	48
● 13356HPT	2-1/2" x .090 RG 304 SS	4	0.9	3.6	48



NV65AH2  
2-1/2" Coil Siding Nailer

ALSO FITS:

NV65AH  
NV75AG  
NV75A5

Fits most round head coil siding nailers



## Fastener Coating Key:

- Basic Bright
- Heat Treated / Hardened
- Electro Galvanized
- Hot Dipped Galvanized
- Stainless Steel

## Fastener Description Key:

- BS = Basic Bright
- EG = Electro Galvanized
- HDG = Hot Dipped Galvanized
- HT = Heat Treated or Hardened
- SS = Stainless Steel
- SM = Smooth Shank
- RG = Ring Shank
- SC = Screw Shank
- BL = Blunt Point
- DP = Diamond Point

## Screw Coating Key:

- Clear Zinc
- Phosphate
- Yellow Zinc
- GrabberGuard
- Stainless Steel

## Screw Description Key:

- BH = Bugle Head
- SVH = Scavenger Head
- FH = Flat Head
- TH = Trim Head
- SP = Sharp Type Point
- DW = Drywall
- SD = Self Drilling
- FT = Fine Thread
- CT = Coarse Thread
- CZ = Clear Zinc
- PHOS = Phosphate
- YZ = Yellow Zinc
- STL = Steel
- SS = Stainless Steel
- GG = Grabber Guard

### 15° ROUND HEAD WIRE COIL NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
○ 12200HPT	2" x .099 SM BS	-	-	9	40
○ 12201HPT	2" x .099 RG BS	-	-	9	40
○ 12209HPT	2" x .099 SC BL DP BS	-	-	9	40
○ 12205HPT	2" x .099 SC BL CHS BS	-	-	9	40
○ 12203HPT	2" x .113 SM BS	-	-	5	56
○ 12226HPT	2" x .113 RG BS	-	-	5	56
○ 12206HPT	2-1/4" x .099 SC BL CHS BS	-	-	9	40
○ 12210HPT	2-1/4" x .099 SC BL DP BS	-	-	9	40
○ 12210DHPT	2-1/4" x .099 SC DP BS	-	-	9	40
○ 12219HPT	2-3/8" x .099 RG BS	-	-	9	40
○ 12221HPT	2-3/8" x .113 SM BS	-	-	5	48
○ 12211HPT	2-3/8" x .113 RG BS	-	-	5	48
○ 12211HHPT	2-3/8" x .113 RG BS	-	-	2.7	72
○ 12218HPT	2-1/2" x .099 SC BL CHS BS	-	-	9	40
○ 12236HPT	2-1/2" x .131 SM BS	-	-	4.5	48
○ 12236HHPT	2-1/2" x .131 SM BS	-	-	2.4	72
○ 12213HPT	3" x .120 SM BS	-	-	4	45
○ 12213HHPT	3" x .120 SM BS	-	-	2.4	60
○ 12231HPT	3" x .120 SC BS	-	-	4	45
○ 12216HPT	3" x .131 SM BS	-	-	4	45
○ 12216HHPT	3" x .131 SM BS	-	-	2.4	60
○ 12246HPT	3" x .131 RG BS	-	-	4	45
○ 12215HPT	3-1/4" x .120 SM BS	-	-	4	45
○ 12214HPT	3-1/4" x .120 SC BS	-	-	4	45
○ 12217HPT	3-1/4" x .131 SM BS	-	-	4	45
○ 12217HHPT	3-1/4" x .131 SM BS	-	-	2.4	60
● 12400HPT	1-1/2" x .099 SM BS HT	-	-	4.5	48
● 12400HHPT	1-1/2" x .099 SM BS HT	-	-	3	96
● 12410HPT	1-1/2" x .113 SM BS HT	-	-	4.5	48
● 12406HPT	2-1/4" x .099 SM BS HT	-	-	4.5	48
● 12406HHPT	2-1/4" x .099 SM BS HT	-	-	3	72
● 12416HPT	2-1/4" x .113 SM BS HT	-	-	4.5	48
● 12202HPT	2" x .099 RG EG	-	-	9	40
● 12227HPT	2" x .113 RG EG	-	-	5	56
● 12207HPT	2-3/8" x .099 RG EG	-	-	9	40
● 12228HPT	2-3/8" x .113 RG EG	-	-	5	48
● 12249HPT	2-1/2" x .099 SM EG	-	-	9	40
● 12233HPT	2-1/2" x .131 RG EG	-	-	4.5	48
● 12232HPT	3" x .120 SC EG	-	-	4	45
● 12235HPT	3" x .120 RG EG	-	-	4	45
● 12229HPT	3" x .131 SM EG	-	-	4	45
● 12230HPT	3-1/4" x .131 SM EG	-	-	4	45
● 12239HPT	3-1/4" x .131 RG EG	-	-	4	45
● 12700HPT	2" x .099 RG HDG	-	-	5	48
● 12703HPT	2" x .113 RG HDG	-	-	4	56
● 12703HHPT	2" x .113 RG HDG	-	-	2.7	96
● 12701HPT	2-3/8" x .099 RG HDG	-	-	5	48
● 12705HPT	2-3/8" x .113 RG HDG	-	-	4	48
● 12705HHPT	2-3/8" x .113 RG HDG	-	-	2.7	72
● 12711HPT	2-1/2" x .131 SM HDG	-	-	4	48
● 12712HPT	2-1/2" x .131 RG HDG	-	-	4	48
● 12707HPT	3" x .120 RG HDG	-	-	4	45
● 12707HHPT	3" x .120 RG HDG	-	-	2.4	60
● 12708HPT	3" x .120 SC HDG	-	-	4	45
● 12713HPT	3" x .131 SM HDG	-	-	4	45

### 15° ROUND HEAD WIRE COIL NAILS (CONT.)

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
● 12709HPT	3-1/4" x .120 SM HDG	-	-	4	45
● 12710HPT	3-1/4" x .120 SC HDG	-	-	4	45
● 12714HPT	3-1/4" x .131 SM HDG	-	-	4	45
● 12714HHPT	3-1/4" x .131 SM HDG	-	-	2.4	60
● 12605HPT	2-3/8" x .113 RG 304 SS	2	1	2	60
● 12607HPT	3" x .120 RG 304 SS	4	1	4	45



**NV83A5**  
3-1/4" Plastic Strip Coiling Framing Nailer

#### ALSO FITS:

- NV83A4
- NV90AG
- NV90AG(S)

Fits most round head wire coil framing nailers



### SUPER DRIVE PLASTIC COLLATED SCREWS

Item Code	Description	Recess	M's Per Box	M's Per Ctn
● 17251SHPT	8 x 1-3/4" Wood to Wood SP CT YZ	#3 Lox	1	6
● 17252SHPT	8 x 2" Wood to Wood SP CT YZ	#3 Lox	1	6
● 17314SHPT	8 x 2" Wood to Wood or 16-25 GA Stl. SP FT YZ	#2 Lox	1	6
● 17802BHPT	6 x 1-1/4" BH FT Drywall to Metal Collated, Phos	#2 Phil	1M Bucket	
● 17812BHPT	6 x 1-1/4" BH CT Drywall to Wood Collated, Phos	#2 Phil	1M Bucket	
● 17813BHPT	6 x 1-5/8" BH CT Drywall to Wood Collated, Phos	#2 Phil	1M Bucket	
● 17817BHPT	8 x 1-3/4" FH CT Subfloor Collated, YZ	#2 Sq	1M Bucket	
● 17820BHPT	8 x 2" FH CT Decking Collated, Exterior	#2 Sq	1M Bucket	
● 17825BHPT	8 x 2-1/2" FH CT Decking Collated, Exterior	#2 Sq	.8M Bucket	
● 17830BHPT	8 x 3" FH CT Decking Collated, Exterior	#2 Sq	.8M Bucket	



**W6VB3SD2**  
SuperDrive Collated Screw System (2,600 RPM)

#### ALSO FITS:

- W6V4SD2
- SuperDrive Collated Screw System (4,500 RPM)

**SuperDrive®**

### 18 GA 7/16" PLASTIC-CAP STAPLES

● 31102SHPT	7/16" x 7/8" x 18GA EG	-	-	2	24
● 31105SHPT	7/16" x 1-1/4" x 18GA EG	-	-	2	24
● 31107SHPT	7/16" x 1-1/2" x 18GA EG	-	-	2	24



**N3808AP**  
1-1/2" Cap Stapler

Fits most cap staplers

## FASTENERS

### Fastener Coating Key:

- Basic Bright
- Heat Treated / Hardened
- Hot Dipped Galvanized
- Stainless Steel
- Electro Galvanized

### 23 GA HEADLESS PINS

Item Code	Description	Blisters Per Ctn	M's Per Blister	M's Per Ctn	Ctns/Skid
22999SHPT	1/2" x 23 GA EG	10	2	20	350
23000SHPT	5/8" x 23 GA EG	10	2	20	350
23001SHPT	3/4" x 23 GA EG	10	2	20	300
23002SHPT	1" x 23 GA EG	10	2	20	300
23003SHPT	1-3/16" x 23 GA EG	10	2	20	250
23004SHPT	1-3/8" x 23 GA EG	10	2	20	250
23006SHPT	1-3/4" x 23 GA EG	10	2	20	-
23005SHPT	1-9/16" x 23 GA EG	10	2	20	-
23007SHPT	2" x 23 GA EG	10	2	20	-



**NP18DSALT**  
1-3/8" 18V Multivolt Cordless  
23-GA Pin Nailer



**NP50A**  
2" 23-GA Pin Nailer

**ALSO FITS:**  
NP35A  
NP18DSAL

**Fits most 23 gauge  
headless pin nailers**

### 18 GA BRAD NAILS

14100SHPT	5/8" x 18 GA EG	20	5	100	48
24100THPT	5/8" x 18 GA EG	10	1	10	400
14101MHPT	3/4" x 18 GA EG	20	5	100	48
24101THPT	3/4" x 18 GA EG	10	1	10	400
14102SHPT	1" x 18 GA EG	20	5	100	48
24102THPT	1" x 18 GA EG	10	1	10	400
14106SHPT	1-1/4" x 18 GA EG	20	5	100	48
24106THPT	1-1/4" x 18 GA EG	10	1	10	280
14107SHPT	1-1/2" x 18 GA EG	10	5	50	48
24107THPT	1-1/2" x 18 GA EG	10	1	10	280
14103SHPT	1-5/8" x 18 GA EG	10	5	50	48
14105SHPT	1-3/4" x 18 GA EG	10	5	50	48
24105THPT	1-3/4" x 18 GA EG	10	1	10	180
14108SHPT	2" x 18 GA EG	10	5	50	48
24108THPT	2" x 18 GA EG	10	1	10	180



**NT50A5**  
2" 18-GA Pro Brad Nailer



**NT1850DFT**  
2" 18V MultiVolt  
18-GA Cordless Brad Nailer

**ALSO FITS:**  
NT50GSP9  
NT50AE2  
NT1850DE  
NT1850DES  
NT1850DF

**18 gauge  
brad nailers**

### 16 GA STRAIGHT FINISH NAILS

14200HPT	1" x 16 GA EG	12	5	60	48
14201HPT	1-1/4" x 16 GA EG	8	5	40	48
44201SHPT	1-1/4" x 16 GA EG	10	1	10	175
14202HPT	1-1/2" x 16 GA EG	12	2.5	30	48
44202SHPT	1-1/2" x 16 GA EG	10	1	10	175
14203HPT	1-3/4" x 16 GA EG	12	2.5	30	48
44203SHPT	1-3/4" x 16 GA EG	10	1	10	120
14204HPT	2" x 16 GA EG	12	2.5	30	48
44204SHPT	2" x 16 GA EG	10	1	10	120
14206HPT	2-1/2" x 16 GA EG	8	2.5	20	48
44206SHPT	2-1/2" x 16 GA EG	10	1	10	100
44236SHPT	2-1/2" x 16 GA	22	1	-	-



**NT65A5**  
2-1/2" 16-Gauge Pro  
Finish Nailer



**NT1865DMST**  
2-1/2" 18V MultiVolt  
16-GA Cordless Finish Nailer

**ALSO FITS:**  
NT65GSP9  
NT65M2S  
NT1865DM  
NT1865DMS

**Fits most 16 gauge  
straight finish nailers**

### Fastener Description Key:

- AL** = Aluminum
- BS** = Basic Bright
- EG** = Electro Galvanized
- HDG** = Hot Dipped Galvanized
- HT** = Heat Treated or Hardened
- SS** = Stainless Steel
- SM** = Smooth Shank
- RG** = Ring Shank
- SC** = Screw Shank
- FC** = Fiber Cement Nail
- BL** = Blunt Point
- DP** = Diamond Point

### 16 GA ANGLED FINISH NAILS

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
14412HPT	1-1/4" x 16 GA EG	6	2	12	126
14413HPT	1-1/2" x 16 GA EG	6	2	12	126
14414HPT	1-3/4" x 16 GA EG	-	2	-	-
14415HPT	2" x 16 GA EG	-	2	-	-
14418HPT	2-1/2" x 16 GA EG	6	2	12	84



**NT65GSP9**  
2-1/2" Gas Powered  
16-GA Straight Finish Nailer

**Fits most 16 gauge  
angled finish nailers**

### 15 GA "DA" ANGLE FINISH NAILS (33°-36°)

14302HPT	1-1/4" x 15 GA BS	4	4	16	80
14303HPT	1-1/2" x 15 GA BS	4	4	16	80
14304HPT	1-3/4" x 15 GA BS	4	4	16	60
14305HPT	2" x 15 GA BS	4	4	16	60
14306HPT	2-1/4" x 15 GA BS	4	4	16	60
14308HPT	2-1/2" x 15 GA BS	4	3	12	60
24201SHPT	1-1/4" x 15 GA EG	10	1	10	105
14313HPT	1-1/2" x 15 GA EG	4	4	16	60
24202SHPT	1-1/2" x 15 GA EG	10	1	10	105
24203SHPT	1-3/4" x 15 GA EG	10	1	10	104
14315HPT	2" x 15 GA EG	4	4	16	60
24204SHPT	2" x 15 GA EG	10	1	10	104
14318HPT	2-1/2" x 15 GA EG	4	3	12	60
24206SHPT	2-1/2" x 15 GA EG	10	1	10	78
14334HPT	2" x 15 GA 304 SS	4	4	16	60
14335HPT	2-1/4" x 15 GA 304 SS	4	4	16	60
14336HPT	2-1/2" x 15 GA 304 SS	4	3	12	60



**NT65MA4**  
2-1/2" 15-GA  
Angled Finish Nailer



**NT1865DMAST**  
2-1/2" 18V MultiVolt  
15-GA Cordless  
Angled Finish Nailer

**ALSO FITS:**  
NT65GAP9  
NT1865DMA  
NT1865DMAS

**Fits most 15 gauge  
"DA" style angled  
finish nailers**

## Fastener Coating Key:

- Basic Bright
- Hot Dipped Galvanized
- Heat Treated / Hardened
- Stainless Steel
- Electro Galvanized

## Fastener Description Key:

- AL = Aluminum
- BS = Basic Bright
- EG = Electro Galvanized
- HDG = Hot Dipped Galvanized
- HT = Heat Treated or Hardened
- SS = Stainless Steel
- SM = Smooth Shank
- RG = Ring Shank
- SC = Screw Shank
- FC = Fiber Cement Nail
- BL = Blunt Point
- DP = Diamond Point

### 18 GA 1/4" NARROW CROWN FINISH STAPLES

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
11099SHPT	1/4" x 1/2" x 18 GA EG	10	5	50	69
11100SHPT	1/4" x 5/8" x 18 GA EG	10	5	50	60
21100SHPT	1/4" x 5/8" x 18 GA EG	10	1	10	240
11101SHPT	1/4" x 3/4" x 18 GA EG	6	5	30	84
21101SHPT	1/4" x 3/4" x 18 GA EG	10	1	10	240
11102SHPT	1/4" x 7/8" x 18 GA EG	10	5	50	43
11103SHPT	1/4" x 1" x 18 GA EG	6	5	30	69
21103SHPT	1/4" x 1" x 18 GA EG	10	1	10	150
11104SHPT	1/4" x 1-1/8" x 18 GA EG	6	5	30	60
11105SHPT	1/4" x 1-1/4" x 18 GA EG	10	5	50	36
21105SHPT	1/4" x 1-1/4" x 18 GA EG	10	1	10	150
11107SHPT	1/4" x 1-1/2" x 18 GA EG	6	5	30	48
21107SHPT	1/4" x 1-1/2" x 18 GA EG	10	1	10	150



**N3804A5**  
1-1/2" Narrow Crown Pro Finish Stapler



**N4004AB**  
1/4" Crown Flooring Stapler

### ALSO FITS:

NP35A  
N3804AB3

Fits most 1/4 inch narrow crown staplers

### 16 GA 15/16" WIDE CROWN STAPLES

Item Code	Description	Boxes Per Ctn	M's Per Box	M's Per Ctn	Ctns/Skid
11401HPT	15/16" x 7/8" x 16 GA EG	-	-	10	60
11403HPT	15/16" x 1-1/4" x 16 GA EG	-	-	10	60
11404HPT	15/16" x 1-1/2" x 16 GA EG	-	-	10	60
11406HPT	15/16" x 2" x 16 GA EG	-	-	10	75



**N5021A**  
15/16" Wide Crown Stapler

Fits most 15/16 inch wide crown staplers

### 16 GA 1" WIDE CROWN STAPLES

11300HPT	1" x 5/8" x 16 GA EG	-	-	10	60
11301HPT	1" x 7/8" x 16 GA EG	-	-	10	60
11305HHPT	1" x 3/4" x 16 GA EG	-	-	10	60
11302HHPT	1" x 1" x 16 GA EG	-	-	10	60
11303HHPT	1" x 1-1/4" x 16 GA EG	-	-	10	60
11304HHPT	1" x 1-1/2" x 16 GA EG	-	-	10	60
11306HPT	1" x 1-3/4" x 16 GA EG	-	-	5	75
11307HPT	1" x 2" x 16 GA EG	-	-	5	75



**N5024A2**  
1" Wide Crown Stapler

Fits most 1 inch wide crown staplers

### 16 GA 7/16" STANDARD CROWN STAPLES

11200HPT	7/16" x 1" x 16 GA EG	-	-	10	60
11201HPT	7/16" x 1-1/4" x 16 GA EG	-	-	10	60
11203HHPT	7/16" x 1-1/2" x 16 GA EG	-	-	10	60
11205HHPT	7/16" x 1-3/4" x 16 GA EG	-	-	10	60
11206HPT	7/16" x 2" x 16 GA EG	-	-	10	60



**N5008AC2**  
7/16" Standard Crown Stapler

Fits most 7/16 inch standard crown staplers

### 20 GA 7/16" CROWN HAMMER TACKER STAPLES

11801HPT	7/16" x 5/16" x 20 GA EG	20	5	100	60
11802HPT	7/16" x 3/8" x 20 GA EG	20	5	100	60

Fits most 7/16" crown A11 staplers

### 20 GA 1/2" CROWN HAMMER TACKER STAPLES

11699HPT	1/2" x 5/16" x 20 GA EG	20	5	100	60
----------	-------------------------	----	---	-----	----

Fits most 1/2" crown DF-5000 staplers

### 16 GA 1/2" MEDIUM CROWN STAPLES

11501HPT	1/2" x 7/8" x 16 GA EG	-	-	10	60
11503HPT	1/2" x 1" x 16 GA EG	-	-	10	60
11506HPT	1/2" x 1-1/4" x 16 GA EG	-	-	10	60
11504HPT	1/2" x 1-1/2" x 16 GA EG	-	-	10	60
11508HPT	1/2" x 2" x 16 GA EG	-	-	10	60



**N5010A**  
1/2" Medium Crown Stapler

Fits most 1/2 inch wide crown staplers

### FS FLOORING STAPLE 15.5 GA 1/2" CROWN FLOORING STAPLES

04722HHPT	1/2" x 2" x 15.5 GA EG	-	-	7.7	60
04723HHPT	1/2" x 1-3/4" x 15.5 GA EG	-	-	7.7	60
04724HHPT	1/2" x 1-1/2" x 15.5 GA EG	-	-	9.6	60



**N5010AB**  
1/2" Crown Flooring Stapler


Fits most 1/2 inch wide crown flooring staplers



## PNEUMATIC ACCESSORIES

### AIR HOSES

#### POLY AIR HOSE

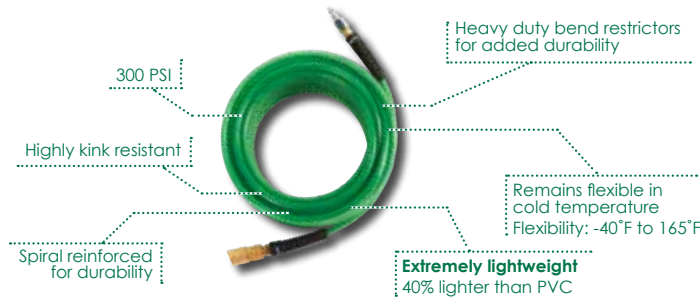

ITEM #	FITTING	LENGTH	INCLUDED ACCESSORIES	INNER QTY.
115155M	1/4" Industrial	50'	Coupler & Plug	6
115156M	1/4" Industrial	100'	Coupler & Plug	6
19412QPM	1/4" Industrial	50'	Not Included	6
19413QPM	1/4" Industrial	100'	Not Included	6
115749M	1/4" Industrial	50'	10pc Accessory Kit	6

#### HYBRID AIR HOSE




ITEM #	FITTING	LENGTH	INCLUDED ACCESSORIES	INNER PACK QTY.
115158M	1/4" Industrial	50'	Coupler & Plug	4
115159M	1/4" Industrial	100'	Coupler & Plug	4
115318M	3/8"	100'	Coupler & Plug	4
115319M	3/8"	50'	Not Included	6
115320M	1/4" Industrial	50'	Not Included	6
115321M	1/4" Industrial	100'	Not Included	4

### FITTINGS

#### Industrial Couplers & Plugs

- 6 Ball bearing construction for longer life
- Tubular valve design provides higher flow
- NBR seal for longer life
- High quality brass for corrosion resistance



ITEM #	STYLE	NPT SIZE	THREAD	INNER QTY.
115323M	Plug	3/8"	Female	4
115327M	Coupler	3/8"	Female	4
115140M	Plug	1/4"	Male	25
115148M	Coupler	1/4"	Male	25
115142M	Plug	3/8"	Male	25
115147M	Coupler	1/4"	Female	25

#### Automotive Couplers & Plugs

- Hardened steel locking ball bearings ensure connection holds tight
- Plugs are zinc plated for longer life
- NBR seal for longer life
- Zinc plated steel construction for longer life



ITEM #	STYLE	NPT SIZE	THREAD	INNER QTY.
115332M	Plug	1/4"	Male	4
115391M	Plug	3/8"	Male	25
115393M	Plug	1/4"	Male	25
115394M	Plug	1/4"	Female	25
115307M	Coupler	3/8"	Male	4
115398M	Coupler	1/4"	Female	10

### OTHER ACCESSORIES

#### Hose Repair Kits

ITEM #	SIZE	DESCRIPTION	INNER QTY.
115162M	1/4"	Hose Repair Kit	4
115163M	3/8"	Hose Repair Kit	4
115164M	1/4"	Hose Repair Splicers	4
115313M	1/4"	Poly Hose Repair Splicers	4

#### Oil

ITEM #	SIZE	DESCRIPTION	INNER QTY.
115338M	4 oz	All Season Air Tool Oil	12

#### MANIFOLDS

ITEM #	SIZE	DESCRIPTION	INNER QTY.
115315M	1/4"	Straight Manifold w/ 4 Couplers/Plugs	4
115316M	1/4"	Round Manifold w/ 3 Couplers/Plugs	4
115334M	3/8" in 1/4" out	Round Manifold, 3-Way	4



Full Line-up Pneumatic Accessories on [www.metabo-hpt.com](http://www.metabo-hpt.com)

The below limited warranty coverage is conditioned upon the original purchaser furnishing adequate written proof of the original purchase date. FOR CALIFORNIA RESIDENTS: This warranty starts the date of delivery of the product to the consumer. Please read this entire document for terms that apply to all limited warranty coverage. This limited warranty does not apply to Outdoor Power Equipment, including 2-cycle & 4-cycle gas powered equipment and battery & electric-powered Outdoor Power Equipment. Warranty terms that apply to Outdoor Power Equipment can be found at <https://www.metabo-hpt.com/us/main-navigation/service-support/warranty-info>.

### 5-Year Limited Warranty

Products are warranted to the original purchaser to be free from defect in materials and workmanship for a period of five (5) years from the original purchase date. Some Products are excepted from this policy and have different limited warranty terms; see Exceptions below.

#### Exceptions Include:

#### Lifetime Limited Warranty for Cordless Lithium Ion Power Tools

The Product categories listed below are warranted to the original purchaser to be free from defect in materials and workmanship for a Lifetime from the original purchase date in non- industrial use; wear and tear is not covered. Lifetime is defined as the serviceable life of the Product. "Serviceable life of the Product" is defined as the period during which the supply of all components is available.

<i>Band Saws</i>	<i>Hammer Drills</i>	<i>Nailers</i>	<i>Reciprocating Saws</i>	<i>Shears</i>
<i>Circular Saws</i>	<i>Impact Drivers</i>	<i>Nibblers</i>	<i>Right Angle Drills</i>	<i>Staplers</i>
<i>Driver Drills</i>	<i>Impact Wrenches</i>	<i>Oscillating Tools</i>	<i>Routers</i>	<i>Track Saw</i>
<i>Drywall Cut Out Tool</i>	<i>Jig Saws</i>	<i>Planers</i>	<i>Screwdrivers</i>	<i>Workshop Blowers</i>

### 2-Year Limited Warranty

The Product categories listed below are warranted to the original purchaser to be free from defect in materials and workmanship for a period of two (2) years from the original purchase date.

<i>Caulking Gun</i>	<i>Grease Gun</i>	<i>Jobsite Lighting</i>	<i>Lithium Ion Batteries</i>	<i>Table Saws</i>
---------------------	-------------------	-------------------------	------------------------------	-------------------

### 1-Year Limited Warranty

The Product categories listed below are warranted to the original purchaser to be free from defect in materials and workmanship for a period of one (1) year from the original purchase date.

<i>AC Adapter</i>	<i>Battery Chargers</i>	<i>Corded Hammer Drills</i>	<i>Grinders</i>	<i>Portable Cut-Off Saws</i>	<i>Rotary Hammers</i>
<i>Air Compressors</i>	<i>Chop Saws</i>	<i>Demolition Hammers</i>	<i>Heat Guns</i>	<i>Radios</i>	<i>Screw Guns</i>
<i>Air Inflator</i>	<i>Collated Screw</i>	<i>Fans</i>	<i>Masonry Cutters</i>	<i>Reserve Air Tanks</i>	<i>Vacuums</i>
	<i>Fastening Systems</i>				

### 90-Day Limited Warranty

The parts listed below are warranted to the original purchaser to be free from defect in materials and workmanship for a period of 90 days from the original purchase date.

<i>Blade Flanges</i>	<i>Carbon Brushes</i>	<i>Drive Belts</i>	<i>Gaskets</i>	<i>Pistons</i>	<i>Seals</i>
<i>Bumpers</i>	<i>Cords</i>	<i>Driver Blades</i>	<i>O-Rings</i>	<i>Pulleys</i>	<i>Tool Free Handles</i>

### 30-Day Limited Warranty

The Product category listed below is warranted to the original purchaser to be free from defect in materials and workmanship for a period of 30 days from the original purchase date.

#### Accessory Products (Excludes Fasteners)

#### Owner's Registration Card

The return of the Owner's Registration Card by the original purchaser within 10 days after the original purchase date is not a condition precedent to coverage under this warranty.

#### Warranty Coverage

This Product is warranted by Koki Holdings America Ltd. against defective materials or workmanship. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state or province to province.

*This warranty is void if: the defects in materials or workmanship or damages result from repairs or alterations which have been made or attempted by others or the unauthorized use of nonconforming parts; the damage is due to normal wear and tear, the damage is due to abuse (including but not limited to overloading of the Product beyond capacity), failure to operate the unit in the manner specified by the owner's manual, improper or lack of maintenance, improper set up or altered Products, neglect, accidents, acts of nature, improper adjustments, or if the damage is due to use of the Product after partial failure or use with improper accessories.*

Except as noted above, this warranty does not cover repair or replacement of wear and tear or maintenance items, including but not limited to: brushes, piston drivers, bumpers, and springs. Regular maintenance, adjustments to the alignment, and wear items are not the responsibility of Koki Holdings America and are not covered under this warranty.

#### Online Purchases

In the interest of maintaining the quality of Products, and to protect consumers from counterfeit, improperly modified, or illegally acquired Products, this warranty will be void if the Product was purchased online and was not purchased from an "Authorized Online Retailer."

Warranty coverage for online purchases is conditioned upon the original purchaser furnishing Koki Holdings America or our Authorized Service Center with adequate written proof of the original purchase date as well as the entity or service that the Product was purchased from. Should the purchaser be unable to provide adequate proof of purchase date and/or source of purchase, fulfillment of warranty coverage will be left to our sole discretion.

Please consult the Metabo HPT website for USA: [www.metabo-hpt.com](http://www.metabo-hpt.com), 1-800-829-4752 and for CANADA: [www.metabo-hpt.com/ca](http://www.metabo-hpt.com/ca), 1-800-970-2299 for a full list of Authorized Online Retailers.

#### Warranty Performance

DURING THE ABOVE WARRANTY PERIOD, SHOULD YOUR PRODUCT EXHIBIT A DEFECT IN MATERIALS OR WORKMANSHIP, SUCH DEFECT WILL BE REPAIRED WHEN THE COMPLETE PRODUCT AND PROOF OF PURCHASE IS RETURNED, POSTAGE PREPAID AND INSURED, TO AN AUTHORIZED SERVICE CENTER OR FACTORY SERVICE CENTER. OTHER THAN THE POSTAGE AND INSURANCE REQUIREMENT, NO CHARGE WILL BE MADE FOR REPAIRS COVERED BY THIS WARRANTY.

#### Warranty Disclaimers

THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES, WRITTEN OR ORAL. TO THE EXTENT PERMITTED BY LAW, KOKI HOLDINGS AMERICA LTD. DISCLAIMS ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE; TO THE EXTENT SUCH DISCLAIMER IS NOT PERMITTED BY LAW, SUCH IMPLIED WARRANTIES ARE LIMITED TO THE DURATION OF THE APPLICABLE EXPRESS WARRANTY AS DESCRIBED ABOVE. IN NO EVENT SHALL KOKI HOLDINGS AMERICA BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS, ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO, FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO, ANY CLAIMS FOR LOSS OF PROFITS.

#### Limitations On Warranty Disclaimers

Some states or provinces do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply to you. Some states or province do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

This warranty applies only to products purchased and used in the United States and Canada. For Products purchased in but used outside the United States and Canada, this warranty covers only warranty service within United States and Canada (and does not include shipping outside the United States and Canada).

Please consult the Metabo HPT website for USA: [www.metabo-hpt.com](http://www.metabo-hpt.com), 1-800-829-4752 and for CANADA: [www.metabo-hpt.com/ca](http://www.metabo-hpt.com/ca), 1-800-970-2299 to locate your nearest service facility for warranty and non-warranty service on a Metabo HPT Product and to obtain information on warranty performance.





# metabo **HPT**

**Follow. Tweet. Subscribe.  
Review. Watch.**

Connect with Metabo HPT



@metabohpt



@MetaboHPT



@metabohptusa



@MetaboHPT



@metabo-hpt



**Read + Write Tool Reviews**  
[www.metabo-hpt.com](http://www.metabo-hpt.com)



Please visit our website at  
[www.metabo-hpt.com](http://www.metabo-hpt.com)

For the dealer nearest you, call  
1-800-546-1666

For more information, call or email  
1-800-706-7337  
[reachcustomerservice@metabo-hpt.com](mailto:reachcustomerservice@metabo-hpt.com)

For technical service, call  
1-866-775-9429

Koki Holdings America Ltd.  
1111 Broadway Avenue  
Braselton, GA, 30517, USA

Koki Holdings Co., Ltd.  
Shinagawa Intercity Tower A, 20th Floor  
15-1, Konan 2-chome  
Minato-ku, Tokyo 108-6020, Japan



7 54005 09018 3